



## General Description

TUBU'S IP66 LED Tri-proof light is designed for outdoor as well as indoor installations and is ideally suited for applications where wide-angle illumination is desired. These fixtures are IP66 rated and are an ideal solution for both wet and dry locations such as parking garages and exterior hallways as well as factory production areas, basements and storage areas. They are available in lengths from 2 feet to 5 feet with both surface mount

## Features

- High Output LED's, up to **90~120m/W**, LM80 certified light source
- High CRI >80
- UL, FCC, TUV, RCM, CB, CE certified driver, High PF>0.96 low THD driver
- Flicker free (different brand optional)
- Environmentally friendly, no mercury, No UV, No IR
- Linkable (Customize cable length) Optional
- IP66 waterproof, dust, corrosion and pressure-proof; for indoor&outdoor using
- Energy Efficiency Grade: A+
- Quick Start instant 100% luminous flux
- **5 Year Warranty** on complete fixture. (LED's, Driver, & Housing)
- Certificate: CE, RoHS
- Optional: 1-10V Dimming, MW Sensor, 3h Emergency Battery Backup


## Applications

- Car parking Lighting
- School Lighting
- Workshops
- Supermarket
- Warehouse
- Storage

## Electrical and Technical Data

Model No	TBTE2F-20W	TBTE4F-30W	TBTE4F-40W	TBTE5F-50W
Input Power	20W	30W	40W	50W
Dimension	662*86*90mm	1172*86*90mm	1172*86*90mm	1566*86*90mm
CCT	3000-6000K	3000-6000K	3000-6000K	3000-6000K
CRI	>80	>80	>80	>80
Power Factory	>0.9	>0.9	>0.9	>0.9
IP Grade	IP66	IP66	IP66	IP66
Input Voltage	200-240V	200-240V	200-240V	200-240V
Luminous	1800~2400lm	2700~3600lm	3600~4800lm	3600~4800lm
Beam Angle	120°	180°	180°	180°
Working Temp	-20°-50°	-20°-50°	-20°-50°	-20°-50°
Warranty	5 Years	5 Years	5 Years	5 Years
Lifespan	50000H	50000H	50000H	50000H

## Product Dimension&Package Details

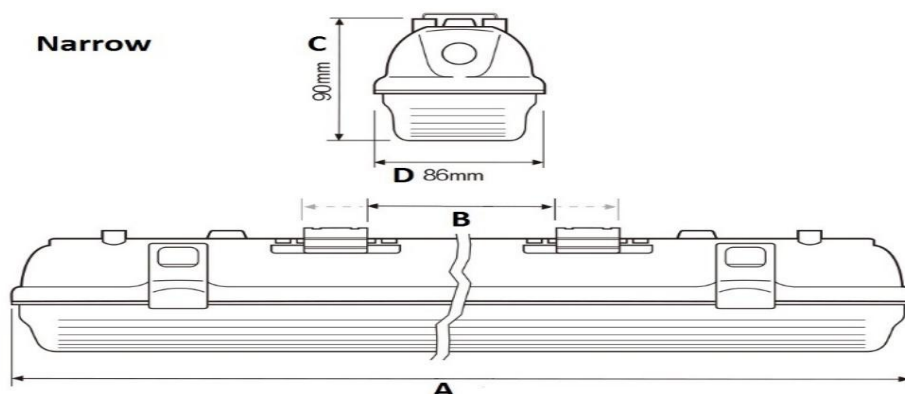

Model	A(Length)	D(Width)	C(Height)	N.W/PC	G.W/PC	Qty/CTN	Size/CTN
TBTE2F-20W	662mm	86mm	90mm	1.5KG	1.8KG	6PCS/CTN	735*270*185mm
TBTE4F-30W	1272mm	86mm	90mm	2.2KG	2.5KG	6PCS/CTN	1345*270*185mm
TBTE4F-40W	1272mm	86mm	90mm	2.2KG	2.5KG	6PCS/CTN	1345*270*185mm
TBTE5F-50W	1566mm	86mm	90mm	2.5KG	3.0KG	6PCS/CTN	1639*270*185mm

## Installation

