



UGR<19
CRI97



TRIDONIC

SEOUL



**LM
80**



RoHS



>50.000



General Description

TUBU's L6 Linear Sunlight is an All New Glare-free UGR<19, CRI97 linear fixture. It's perfect for office illumination. It's designed to distribute the light evenly across the floor glare-free in order to reduce stress on worker's eyes while maintaining a pleasant luminance in accordance with IEC62471. Powered by Seoul 3030 LEDs, high lumen up to 80lm/W and high CRI97. These lights offer a long lifetime and excellent lumen maintenance to minimise the maintenance costs.

Benefits

- Fast and easy installation
- A +++ 92% Energy saving compare to Halogen, 60% compare to Fluorescent, 60% compare to Metal Halide lighting
- Lower maintenance cost thanks to over 3 times longer lifetime

Features

- Seoul 3030 LED's, up to 80lm/W
- Glare-free **UGR<19**, Provides Improved Visual Comfort
- **High CRI >97**
- **SDCM<3**
- TRIDONIC brand driver
- Flicker free
- Environmentally friendly, no mercury, No UV, No IR
- IP20, indoor use


Applications

- Residential
- Healthcare
- Architectural
- Hospitality
- Retail

Electrical and Technical Data

Model No	TBL62F-20W97	TBL65F-50W97
Input Power	20W	50W
Dimension	600mm	1500mm
Luminous Efficiency	1400~1700lm	3900~4100lm
Housing Color	White/Silver/Black	
CCT	3000K/4000K	
CRI	>95~97	
SDCM	SDCM<3	
Power Factor	>0.9	
Driver	TRIDONIC Driver(Internal)	
IP Grade	IP20	
Input Voltage	220~240VAC	
Luminous Efficiency	80lm/W	
Beam Angle	40° & 60°	
Working Temp	-20°-45°	
Warranty	5 Years	
Lifespan	50,000H	

Product Dimension&Package Details

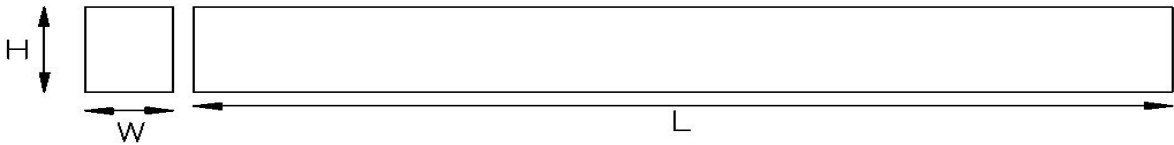

Width: 50mm
Height:70mm

Model	W(Norm)	H(Norm)	L(Norm)	N.W/CTN	G.W/CTN	Qty/CTN	Size/CTN
TBL62F-20W97	50mm	70mm	600mm	13KG	15.3KG	10PCS	630x285x385mm
TBL65F-50W97	50mm	70mm	1500mm	15.5KG	18.5KG	4PCS	630x290x85mm