


Slimline LED Floodlight F8

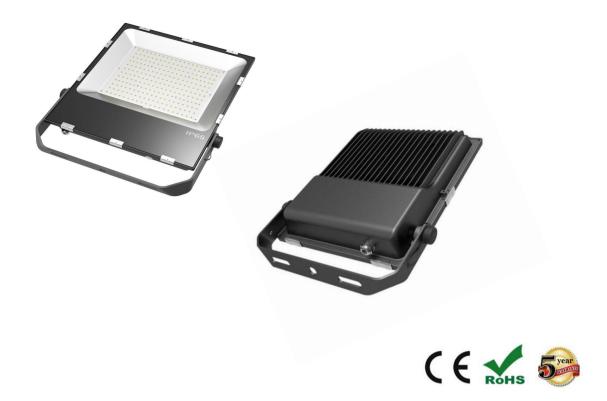

General Description

TUBU's Slimline LED Flood Light F8 is the environmentally preferred alternative to traditional metal halide lamps. It is the maintenance free and cost-effective solution to be widely used in illuminating facades, landscapes, parking areas, and apartment complexes.

Benefits

- Fast and easy installation to replace existing HID & HPS fi xtures up to 500W
- A +++ 92% Energy saving compare to Halogen, 60% compare to Fluorescent, 60% compare to Metal Hilide lighting
- Lower maintenance cost thanks to over 3 times longer lifetime

Features

- High Output LED's,up to 120lm/W
- High CRI >80
- Philips 3030 LED chip
- Meanwell brand driver ,TUV UL CE certificate,PF>0.96, THD<12
- Ultra slim design- only 60mm deep
- Durable tempered glass front- 4mm thickness
- Environmentally friendly, no mercury, No UV, No IR
- IP65, indoor & outdoor use
- Energy Efficiency Grade: A+++
- Quick to install and easy to use, secure and reliable
- 5 Year Warranty on complete fixture. (LED's, Driver, & Housing)


Applications

- Parking Lot Lighting
- Car Lot Lighting
- Area & Storage Lighting
- Street Lighting
- Walkway Lighting
- Building Accent Lighting

Electrical and Technical Data

Model No	TBF6-30W	TBF6-50W	TBF6-70W	TBF6-100W	TBF6-150W	TBF6-200W		
Input Power	30W	50W	70W	100W	150W	200W		
Dimension	200*167*40mm	265*220*48mm	300*245*50mm	345*295*60mm	365*330*60mm	400*360*60mm		
CCT			3000K, 4000K	, 5000K, 6000K				
CRI			>70					
Power Factory			>0.9	9				
IP Grade	IP65							
Input Voltage			100-2	40V				
Luminous			120lm	n/W				
Beam Angle			120°					
Working Temp	-20°-50°							
Warranty			5 Yea	rs				
Lifespan			50,00)OH				

Product Dimension&Package Details

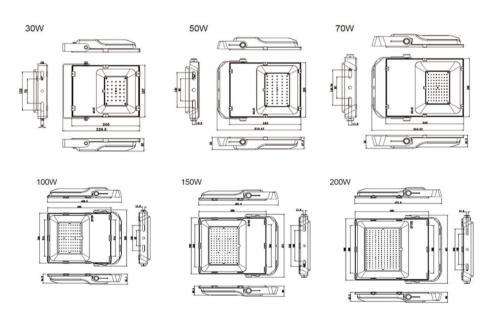

Model	L(Norm)	W(Norm)	H(Norm)	N.W/PC	G.W/CT	Qty/CTN	Size/CTN
TBF8-30W	200mm	167mm	40mm	1.3KG	27.0KG	20PCS/CTN	535X405X260mm
TBF8-50W	265mm	220mm	48mm	2.4KG	20.5KG	8PCS/CTN	530X365X255mm
TBF8-70W	300mm	245mm	50mm	3.5KG	3.8KG	1PCS/CTN	435X340X130mm
TBF8-100W	345mm	295mm	60mm	4.8KG	6.2KG	1PCS/CTN	435X340X130mm
TBF8-150W	365mm	330mm	60mm	5.5KG	7.0KG	1PCS/CTN	510X430X135mm
TBF8-200W	400mm	360mm	60mm	6.5KG	8.5KG	1PCS/CTN	555X460X135mm