



General Description

TUBU's IP65 LED Tri-proof batten fitting L10 V series are an ideal solution for both wet and dry locations such as parking garages and exterior hallways as well as factory production areas, basements and storage areas. They are available in lengths from 2ft to 5ft with both surface mount and suspension mount options.

Features

- Easy Installation
- High Output LED's, up to **130m/W**
- High CRI >80
- IK10 compact design
- High Transmittance PC cover, no shadow
- Flicker Free driver, High PF>0.96 low THD driver
- Environmentally friendly, no mercury, No UV, No IR
- Linkable Option
- IP65 waterproof, dust, corrosion and pressure-proof, vibration proof; for indoor & outdoor use
- Energy Efficiency Grade: A+
- Quick Start instant 100% luminous flux
- **5 Year Warranty** on complete fixture. (LED's, Driver, & Housing)
- Certificate: CE, RoHS


Applications

- Car parking Lighting
- School Lighting
- Workshops
- Supermarket
- Warehouse
- Storage

Electrical and Technical Data

Model No	TBL10A4F-40W-V	TBL10A5F-50W-V
Input Power	40W	50W
Dimension	1200*90*80mm	1500*90*80mm
CCT	3000K / 4000K / 5000K / 5700K	3000K / 4000K / 5000K / 5700K
CRI	>80	>80
Power Factory	>0.9	>0.9
IP Grade	IP65	IP65
Input Voltage	200-240VAC	200-240VAC
PC Cover	Milky	Milky
Lumen Efficacy	130lm/W	130lm/W
Luminous	5000~5200lm	6200~6500lm
Beam Angle	120°	120°
Working Temp	-20°-50°	-20°-50°
Warranty	5 Years	5 Years
Lifespan	L90> 54,000hrs	L90> 54,000hrs

Product Dimension&Package Details

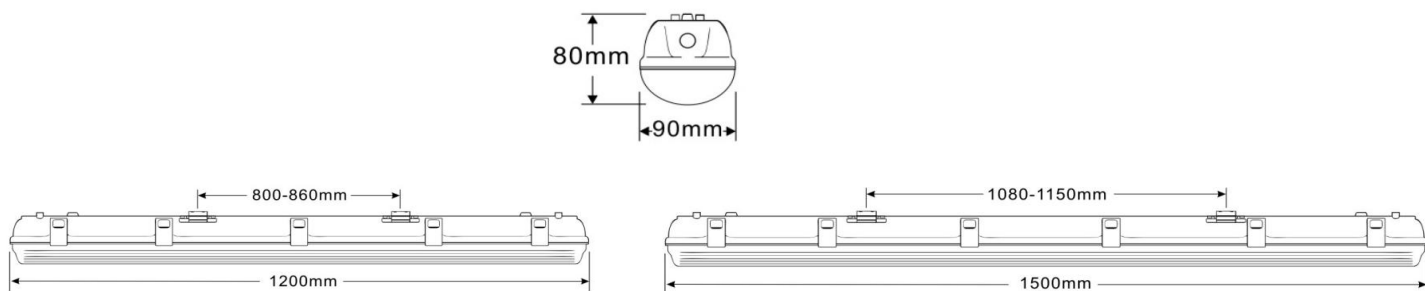

TBL10A4F-40W-V

TBL10A5F-50W-V

Model	A(Length)	D(Width)	C(Height)	N.W/CT	G.W/CT	Qty/CTN	Size/CTN
TBL10A4F-40W-V	1200mm	90mm	80mm	14.6KG	19.5KG	9PCS/CTN	1280*335*290mm
TBL10A5F-50W-V	1500mm	90mm	80mm	17.0KG	22.0KG	9PCS/CTN	1580*335*290mm

Installation

