

IP69K LED Tri-proof Light L9


Features

- IP67 & IP69K & IK10
- PMMA IK08/PC IK10
- Anti-ammonia
- Against water pressure of 100bar(1450psi) and temperature of 80°C
- System efficiency up to 130lm/W & 150lm/W
- High CRI >80
- Environmentally friendly, no mercury, No UV, No IR
- Wide beam angle 120°
- Energy Efficiency Grade: A+
- Quick Start instant 100% luminous flux
- 5 Year Warranty on complete fixture. (LED's, Driver, & Housing)
- Certificate: CE, RoHS Certified
- Surface Mount or Suspension Mount



Applications

- Car parks
- Ships
- Food Processing
- Poultry Lighting
- Farm lighting
- Water treatment plants
- Railway stations
- Car Washing
- Airports
- Inspection pits
- Tunnels
- Port installations



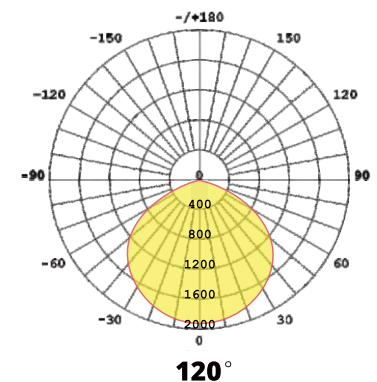


IP69K LED Tri-proof Light

- PC IK10/PMMA IK08
- Anti-ammonia
- Chemical resistant
- 130lm/W & 150lm/W
- Against water pressure of 100bar(1450psi) and temperature of 80°C

TUBU

20W/40W/50W/60W

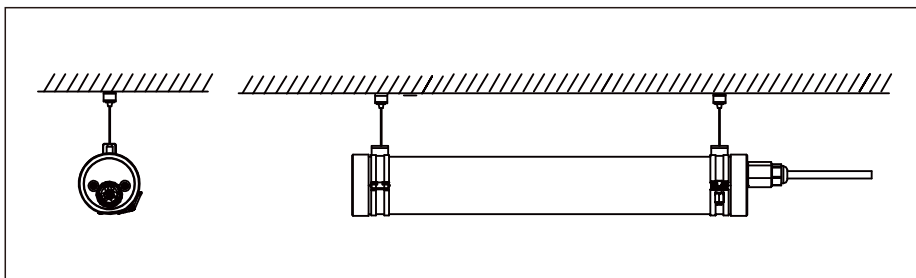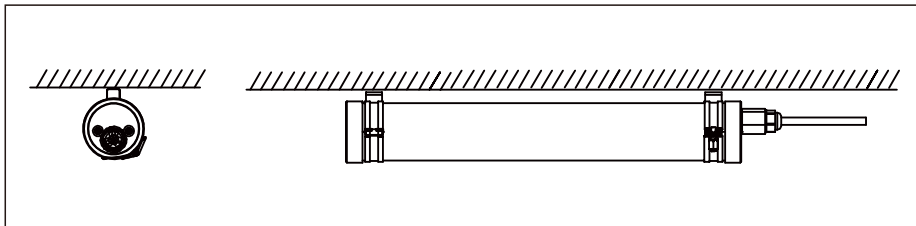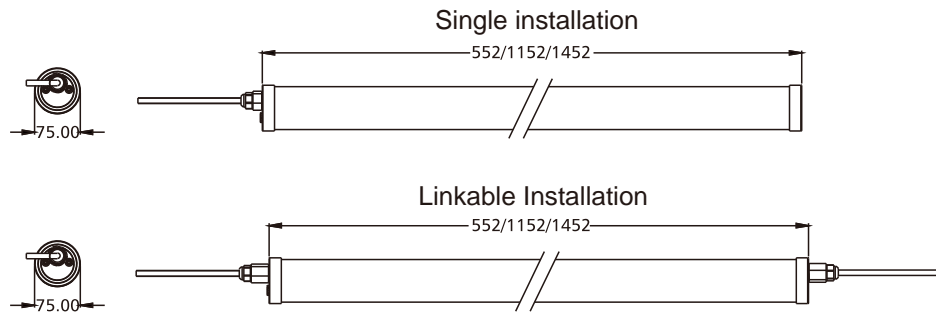

IP69K LED Tri-proof Light I9



Specifications

Product Code	TBL92F-20W	TBL94F-40W	TBL95F-50W	TBL95F-60W	
Power	20W	40W	50W	60W	
Input Voltage	200-240VAC/100-277VAC (50/60HZ)				
Input Current	0.09A@220VAC	0.19A@220VAC	0.23A@220VAC	0.28A@220VAC	
PF	0.90@220VAC				
Dimming Option	0-10V/Dali				
CCT	3000K/4000K/5000K/6000K				
Ra > 80	Luminous Flux	2600Lm±5%	5200Lm±5%	6500Lm±5%	7800Lm±5%
	Efficiency	130Lm/W±5%			
Ra > 80	Luminous Flux	3000Lm/W±5%	6000Lm/W±5%	7500Lm/W±5%	9000Lm/W±5%
	Efficiency	150Lm/W±5%			
LED Brand	Lumileds/Hongli 2835				
Beam Angle	120°				
Operation Temp	-20 C ~ +40 C				
Storage Temp	-20 C ~ +60 C				
Life Span	Ta 40 C L70>54000Hours				
IP Class	IP67&IP69K				
IK Class	PMMA IK08/PC IK10				
Certificate	CE, RoHs, CB, IK10, IP69K, ENEC, RCM				
Lamp Body Color	Milky PC/PMMA Housing & 304/316 Stainless Steel End Caps				
Product Size (mm)	Ø75*552	Ø75*1152	Ø75*1452	Ø75*1452	
Packing Size (mm)	730*260*260	1330*260*180	1630*260*180	1630*260*180	
Quantity/carton	9PCS	6PCS	6PCS	6PCS	
Gross weight (kg) ±0.3	12	15	23	23	
Installation mode	Surface Mount/Suspension Mount				