

TUBU

UGR<16 LED Tubular Light

Features

- IP67 & IP69K & IK10
- PMMA IK08/PC IK10
- Against water pressure of 100bar(1450psi) and temperature of 80 C
- System efficiency up to 130lm/W
- High CRI >80
- UGR<16
- Environmentally friendly, no mercury, No UV, No IR
- Wide beam angle 80°
- Energy Efficiency Grade: A+
- Quick Start instant 100% luminous flux
- 5 Year Warranty on complete fixture. (LED's, Driver, & Housing)
- Certificate: CE, RoHS Certified
- Surface Mount or Suspended




UGR<16 LED Tubular Light

- PC IK10/PMMA IK08
- Low glare design, perfect for indoor use
- 130lm/W
- Against water pressure of 100bar(1450psi) and temperature of 80 C




Applications

- Car parks
- Ships
- Food Processing
- Poultry Lighting
- Farm lighting
- Water treatment plants
- Railway stations
- Car Washing
- Airports
- Inspection pits
- Tunnels
- Port installations



TUBU

20W/40W/50W/60W

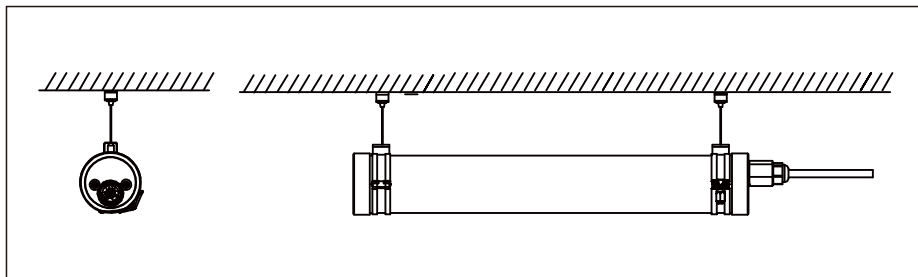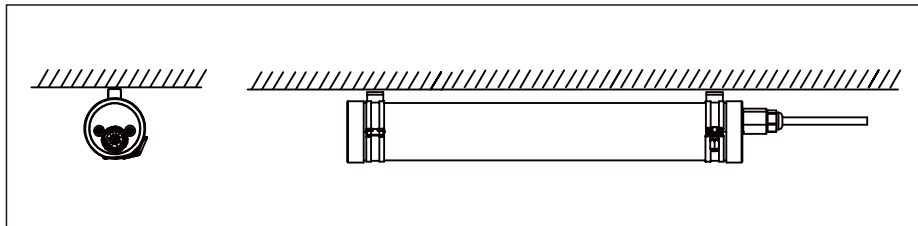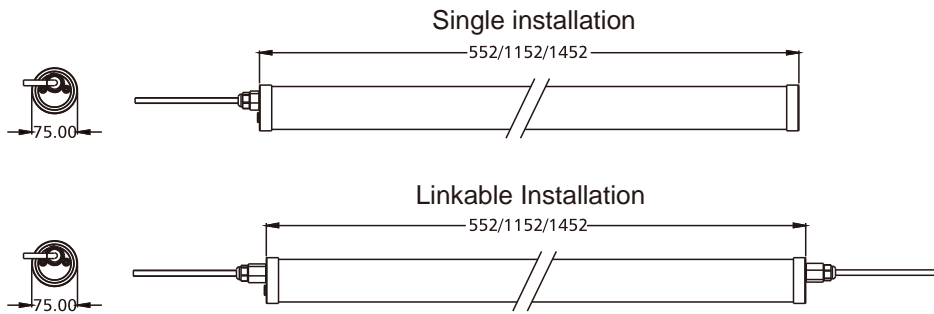

UGR<16 LED Tubular Light



Specifications

| Product Code | TBL92F-20W-UGR16 | TBL94F-40W-UGR16 | TBL95F-50W-UGR16 | TBL95F-60W-UGR16 |
|------------------------|--|------------------|------------------|------------------|
| Power | 20W | 40W | 50W | 60W |
| Input Voltage | 200-240VAC/100-277VAC (50/60HZ) | | | |
| Input Current | 0.09A@220VAC | 0.19A@220VAC | 0.23A@220VAC | 0.28A@220VAC |
| PF | 0.90@220VAC | | | |
| Dimming Option | 0-10V/Dali | | | |
| CCT | 3000K/4000K/5000K/6000K | | | |
| Ra > 80 | Luminous Flux | 2600Lm±5% | 5200Lm±5% | 6500Lm±5% |
| | Efficiency | 130Lm/W±5% | | |
| LED Brand | Lumileds/Hongli | | | |
| Beam Angle | 80° | | | |
| Operation Temp | -20 C ~+40 C | | | |
| Storage Temp | -20 C ~+60 C | | | |
| Life Span | Ta 40 C L70>54000Hours | | | |
| IP Class | IP67&IP69K | | | |
| IK Class | PMMA IK08/PC IK10 | | | |
| Certificate | CE, RoHs, CB, IK10, IP69K, ENEC | | | |
| Lamp Body Color | Milky PC/PMMA Housing & 304/316 Stainless Steel End Caps | | | |
| Product Size (mm) | Ø75*552 | Ø75*1152 | Ø75*1452 | Ø75*1452 |
| Packing Size (mm) | 730*260*260 | 1330*260*180 | 1630*260*180 | 1630*260*180 |
| Quantity/carton | 9PCS | 6PCS | 6PCS | 6PCS |
| Gross weight (kg) ±0.3 | 12 | 15 | 23 | 23 |
| Installation mode | Surface Mount/Suspension Mount | | | |