

UGR<19 IP69K Tri-proof Light




Features

- UGR<19 Low glare (with clear cover & reflectors)
- PMMA Clear IK06/PC Clear IK10
- IP67 & IP69K
- Against water pressure of 100bar(1450psi) and temperature of 80 C
- System efficiency up to 130lm/W
- High CRI >80
- 304/316 stainless steel end caps, breather, mounting bracket
- BOKE isolated driver, flicker free, ENEC/TUV/SAA/CE/C-tick certified
- Wide beam angle 40°/60°/90°
- CE, ROHS, IP69K, IK10, ENEC, RCM, CB certificates
- Surface Mounting bracket included, suspension cables are sold separately
- 5 Year Warranty on complete fixture. (LED's, Driver, & Housing)
- Standard material for end caps, breather, surface mounting bracket is 304 stainless steel
316 material is available for option



Applications

- Schools and universities
- Car parks
- Cultural facilities
- Housing facilities
- Public institutions and offices
- Railway stations and airports
- Tunnels
- Water treatment
- Port and naval installations
- Sports facilities
- Urban lighting
- Inspection pits
- Shopping centres

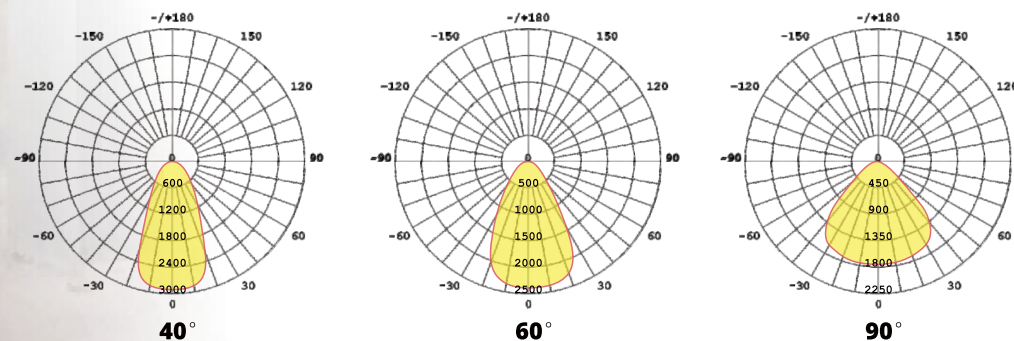

UGR<19 IP69K Tri-proof Light




- PC IK10/PMMA IK10
- Anti-ammonia
- 130LM/W
- Against water pressure of 100bar(1450psi) and temperature of 80 C

TUBU

20W/40W/60W



Single installation

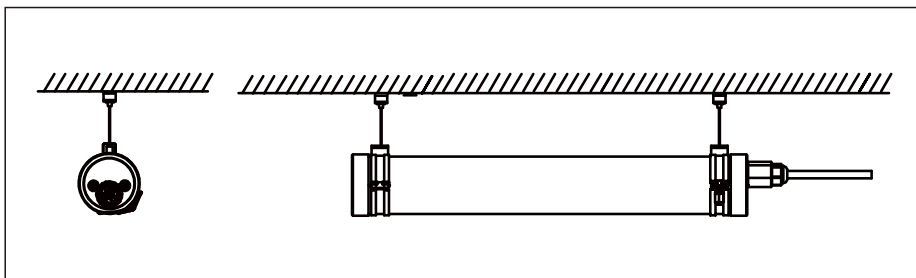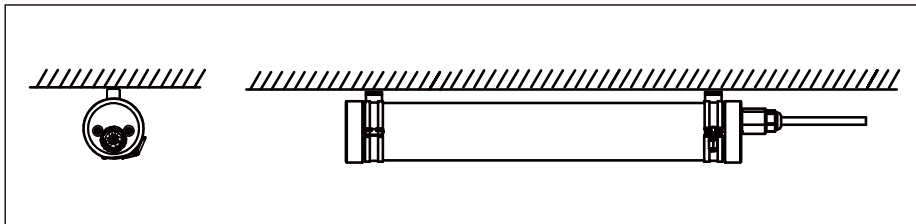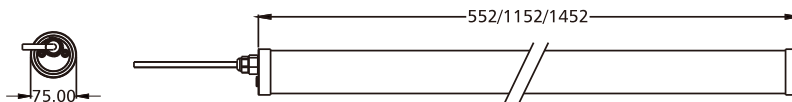

UGR<19 IP69K Tir-proof LIGHT



Specifications

Product Code	TBL92F-20W-DXG	TBL94F-40W-DXG	TBL95F-50W-DXG	TBL95F-60W-DXG	
Power	20W	40W	50W	60W	
Input Voltage	200-240VAC/100-277VAC (50/60HZ)				
Input Current	0.09A@220VAC	0.19A@220VAC	0.23A@220VAC	0.28A@220VAC	
PF	0.90@220VAC				
Dimming Option	0-10V/Dali				
CCT	3000K/4000K/5000K/6000K				
Ra > 80	Luminous Flux	2600Lm±5%	5200Lm±5%	6500Lm±5%	7800Lm±5%
	Efficiency	130Lm/W±5%			
LED Brand	Lumileds/Hongli 3030				
Beam Angle	40°/ 60° UGR< 19°/ 90° UGR<22				
Operation Temp	-20 C ~+40 C				
Storage Temp	-20 C ~+60 C				
Life Span	Ta 40 C L70>54000Hours				
IP Class	IP67&IP69K				
IK Class	PMMA IK08/PC IK10				
Certificate	CE, RoHs, CB, IP69K, RCM, ENEC				
Lamp Body Color	Milky PC/PMMA Housing & 304/316 Stainless Steel End Caps				
Product Size (mm)	∅75*552	75*1152	75*1452	75*1452	
Packing Size (mm)	730*260*260	1330*260*180	1630*260*180	1630*260*180	
Quantity/carton	9PCS	6PCS	6PCS	6PCS	
Gross weight (kg) ±0.3	12	15	23	23	
Installation mode	Surface Mount/Suspension Mount				