

TUBU

LED Linear Low Bay Fixture L1


Features

- 130m/W, standard, 150lm/w optional
- High CRI > 80
- Wide beam angle 160°
- IP65 waterproof, dust corrosion and pressure-proof, for indoor use
- Aluminium housing+PC cover
- 5 Year Warranty
- Certificate: CE, RoHS, ETL, DLC IK10
- Optional: 1-10V, Dali Dimming,
- Hanging mount accessories included; 90°adjustable mounting clips for option



Applications

- Car parking Lighting
- Supermarket
- Workshops
- Storage
- School Lighting
- Warehouse

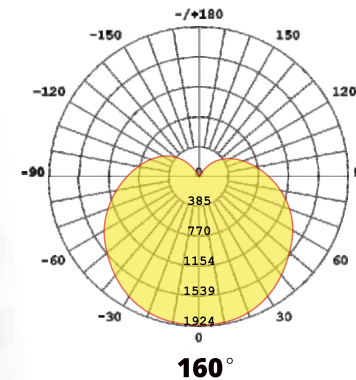


Unique Design Linear Low Bay L1


- 160° Light Distributor
- 90° Rotatable Mount Bracket

TUBU


40W/60W/80W/100W

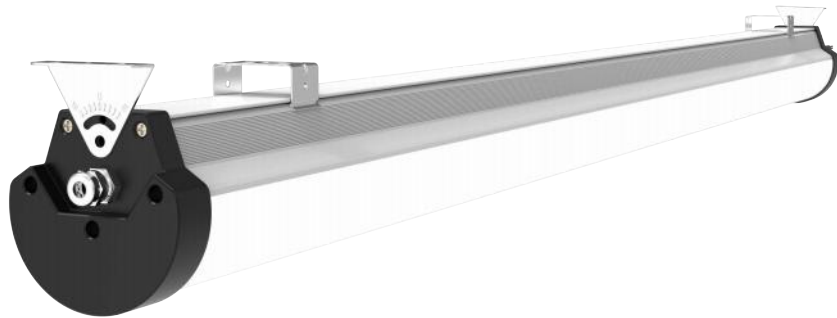

130~150lm/w

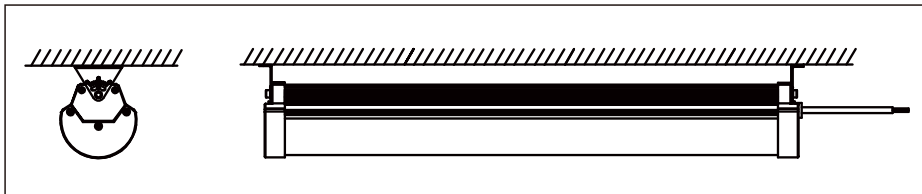

LED Linear Low Bay Fixture L1

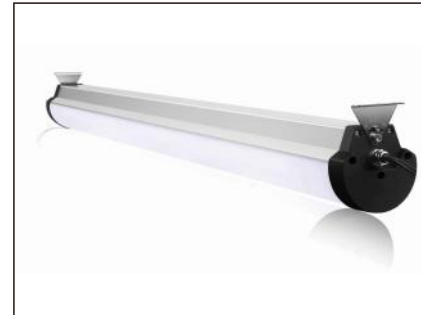

Specifications

Product Code	TBF2F-20W	TBF4F-40W	TBF4F-60W	TBF5F-60W	TBF5F-80W	TBF5F-100W	
Power	20W	40W	60W	60W	80W	100W	
Input Voltage	200-240VAC/100-277VAC (50/60HZ)						
PF	0.90@220VAC						
Dimming Option	0-10V/Dali						
CCT	3000K/4000K/5000K/6000K						
Ra > 80	Luminous Flux	2600Lm±5%	5200Lm±5%	7800Lm±5%	7800Lm±5%	10400Lm±5%	13000Lm±5%
	Efficiency	130Lm/W±5%					
Ra > 80	Luminous Flux	3000Lm±5%	6000Lm±5%	9000Lm±5%	9000Lm±5%	12000Lm±5%	15000Lm±5%
	Efficiency	150Lm/W±5%					
LED Brand	Lumileds/Hongli 2835						
Beam Angle	160°						
Operation Temp	-20 C ~+40 C						
Storage Temp	-20 C ~+60 C						
Life Span	Ta 40 C L70>54000Hours						
IP Class	IP65						
IK Class	IK10						
Certificate	CE, RoHs, DLC, ETL						
Lamp Body Color	Silver Aluminium housing + Milky PC cover						
Product Size (mm)	600*105*127	1200*105*127		1500*105*127			
Packing Size (mm)	690*245*245	1290*245*245		1590*245*245			
Quantity/carton	4PCS	4PCS		4PCS			
Gross weight (kg) ±0.3	15	19		19			
Installation mode	Surface Mount/Suspension Mount						