

TUBU




Grid Type LED Tubular Light

- PC IK10 / PMMA IK08
- Anti-ammonia
- Chemical resistant
- Against water pressure of 100bar(1450psi) and temperature of 80 C

Grid Type LED Tubular Light


Features

- IP67 & IP69K
- PMMA IK08 / PC IK10
- Against water pressure of 100bar(1450psi) and temperature of 80 C
- System efficiency up to 100lm/W
- High CRI >80
- Environmentally friendly, no mercury, No UV, No IR
- Wide beam angle 96.5°
- Energy Efficiency Grade: A+
- Quick Start instant 100% luminous flux
- 5 Year Warranty on complete fixture. (LED's, Driver, & Housing)
- Certificate: CE, RoHs Certified
- Surface Mount or Suspended

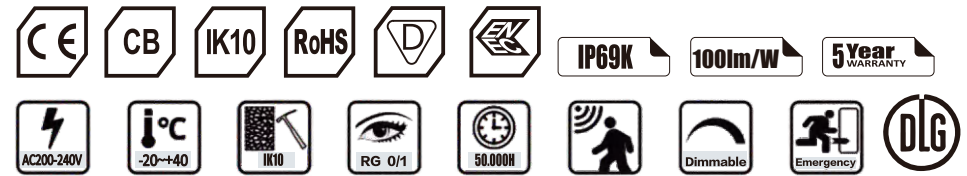

Applications

- Car parking Lighting
- School Lighting
- Workshops
- Supermarket
- Warehouse
- Storage


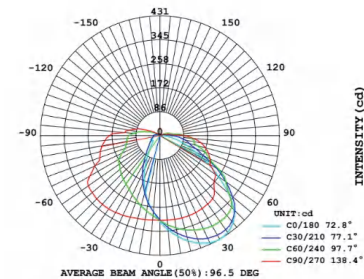


TUBU




20W/40W/50W/60W



Grid Type LED Tubular Light

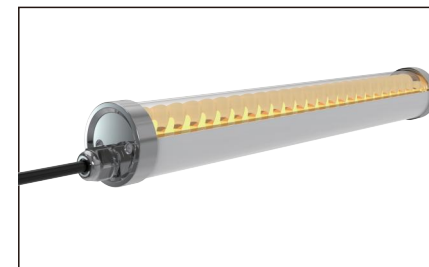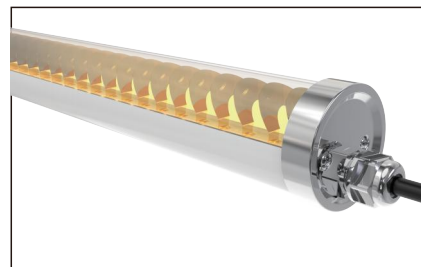

Single installation

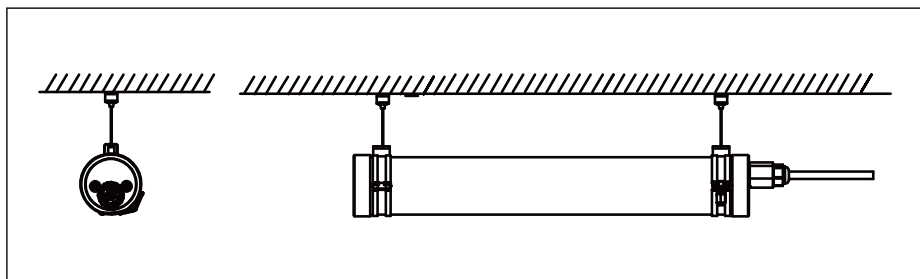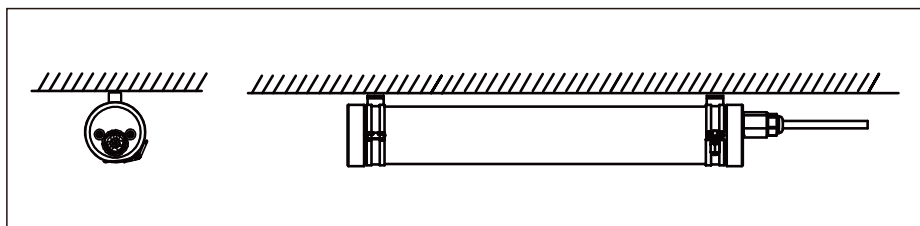

Specifications

Product Code	TBL92F-20W-G	TBL94F-40W-G	TBL95F-50W-G	TBL95F-60W-G
Power	20W	40W	50W	60W
Input Voltage	200-240VAC/100-277VAC (50/60HZ)			
Input Current	0.09A@220VAC	0.19A@220VAC	0.23A@220VAC	0.28A@220VAC
PF	0.90@220VAC			
Dimming Option	0-10V/Dali			
CCT	3000K/4000K/5000K/6000K			
Ra > 80	Luminous Flux	1220Lm±5%	2440Lm±5%	3050Lm±5%
	Efficiency	61Lm/W±5%		
LED Brand	Lumileds/Hongli			
Beam Angle	96.5°			
Operation Temp	-20 C ~ +40 C			
Storage Temp	-20 C ~ +60 C			
Life Span	Ta 40 C L70>54000Hours			
IP Class	IP67&IP69K			
IK Class	PMMA IK08/PC IK10			
Certificate	CE, RoHs, CB, IK10, IP69K, ENEC			
Lamp Body Color	Milky PC/PMMA Housing & 304/316 Stainless Steel End Caps			
Product Size (mm)	Ø75*552	Ø75*1152	Ø75*1452	Ø75*1452
Packing Size (mm)	730*260*260	1330*260*180	1630*260*180	1630*260*180
Quantity/carton	9PCS	6PCS	6PCS	6PCS
Gross weight (kg) ±0.3	12	15	23	23
Installation mode	Surface Mount/Suspension Mount			