

TUBU




High Mast LED Flood Light HMG4

- Wide Beam Angle 7°/15°/30°/60°/90°/120°/Type2/Type3
- IP66 Waterproof Rated
- Adjustable Bracket

High Mast LED Flood Light HMG4


Features

- Efficiency: Up to 160Lm/W, 100-160lm/W available
- LED Chip: LUMILEDS 3030/5050 or Bridgelux 3030
- SDCM: <5
- Beam Angle: 7°/15°/30°/60°/90°/120°Type2/Type3 PC lens
- IP Rating: IP66
- Installation: Bracket
- Certifications: CE, RoHS
- Warranty: 5 years

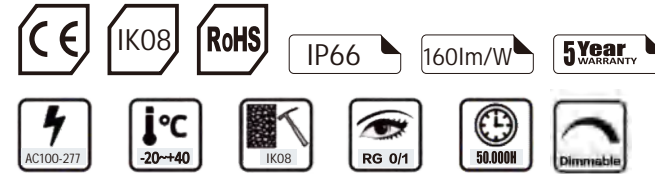

Applications

- Stadium
- Dock
- Football Field
- Golf Course
- Wharf
- Tower Crane
- Basketball Court
- Tennis Court
- Airport
- Large Outdoor Parking Lot

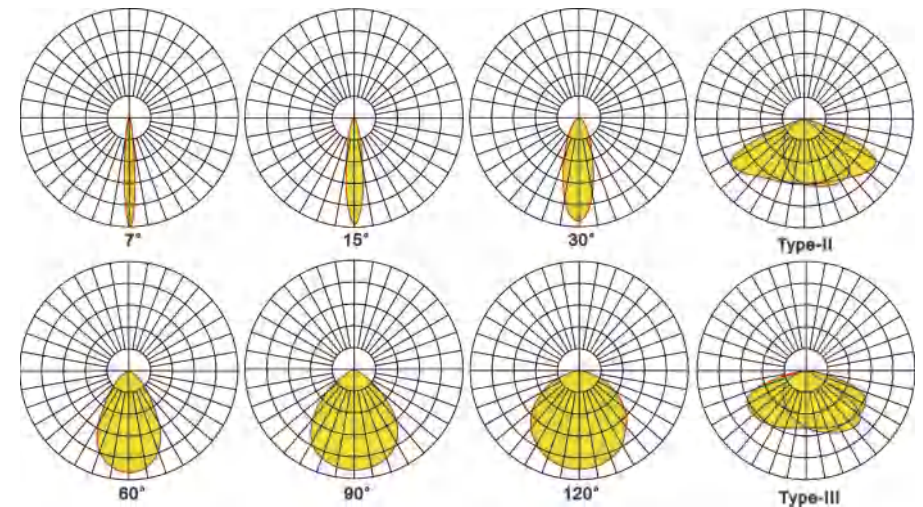


TUBU

500W/600W/1000W/1200W/1500W/1800W



High Mast LED Flood Light HMG4

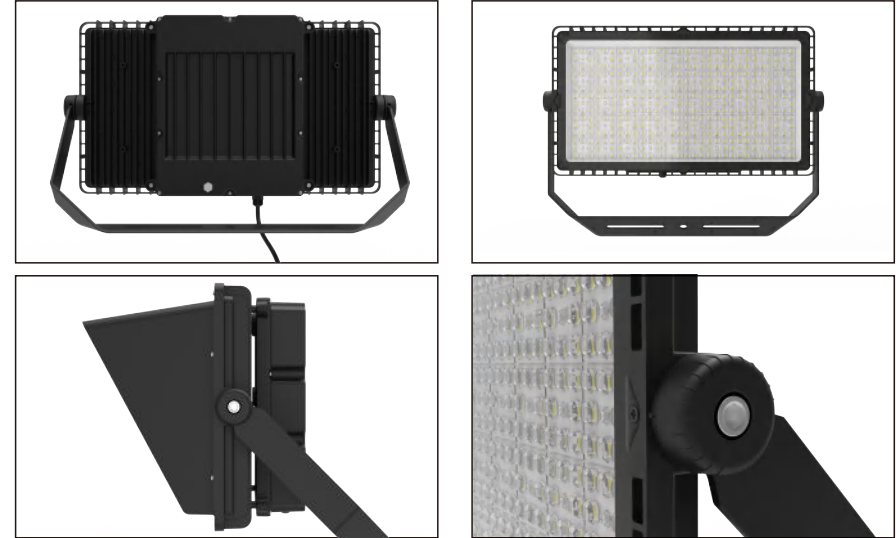

Specifications

| Product Code | HMG4-500W HMG4-600W | HMG4-1000W HMG4-1200W | HMG4-1500W HMG4-1800W | |
|--------------------|---|--------------------------------------|--|--|
| Power | 500W 600W | 1000W 1200W | 1500W 1800W | |
| Input Voltage | 100-277VAC | | | |
| PF | 0.90@220VAC | | | |
| Dimming (Optional) | 0-10V/DALI | | | |
| CCT | 2700K/3000K/4000K/5000K/5700K/6500K | | | |
| Ra > 70 | Luminous Flux | 500W-70000Lm±10% 600W-84000Lm±10% | 1000W-140000Lm±10% 1200W-168000Lm±10% | 1500W-210000Lm±10% 1800W-252000Lm±10% |
| | Efficiency | 140Lm/W±10% | | |
| Ra > 70 | Luminous Flux | 500W-80000Lm±10% 600W-96000Lm±10% | 1000W-160000Lm±10% 1200W-192000Lm±10% | 1500W-240000Lm±10% 1800W-280000Lm±10% |
| | Efficiency | 160Lm/W±10% | | |
| Beam Angle | 7°/15°/30°/60°/90°/120°Type2/Type3 PC lens | | | |
| Operation Temp | -40 C ~+50 C , 20~95%RH No condensation | | | |
| Storage Temp | -20 C ~+85 C , 10~95%RH No condensation | | | |
| Life Span | Ta 50 C L70>54000Hours | | | |
| IP / IK Class | IP66 / IK08 | | | |
| Certificate | CE, RoHs | | | |
| Lamp Body Color | Housing: Die-casting Aluminum Color: Black (RAL9005) Lens: pc | | | |
| Product Warranty | 5 years | | | |
| Installation mode | Surface Mount/Bracket Mount | | | |
| Product Size (mm) | 637*483*134 | 897*673*134 | 1286*673*134 | |
| Packing Size (mm) | 672*534*188 | 990*763*220 | 1378*763*220 | |
| Gross weight (kg) | 16.5 | 40 | 56 | |

