

TUBU

IP66 IK10 LED Batten Light L10-K


Features





- IP66,IK10
- Stainless steel clips
- Isolated flicker free driver
- 130-185lm/W system efficiency,CRI>80
- PC cover & PC base(V2)
- Self-test emergency with LiFePO4 battery option
- Microwave sensor options(wireless control)
- Ambient temperature:-20°C ~ +40°C
- 5 year warranty,CE,RoHS,ENEC,certified
- Options: 1-10V, motion sensor, DALI, emergency
- Surface mount or suspension mount



Applications

- Application warehouse
- Gymnasium
- Museum
- Corridor
- Exhibition hall
- Underground garage

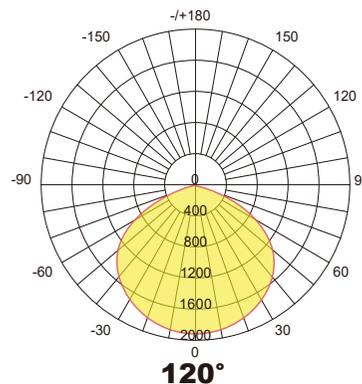

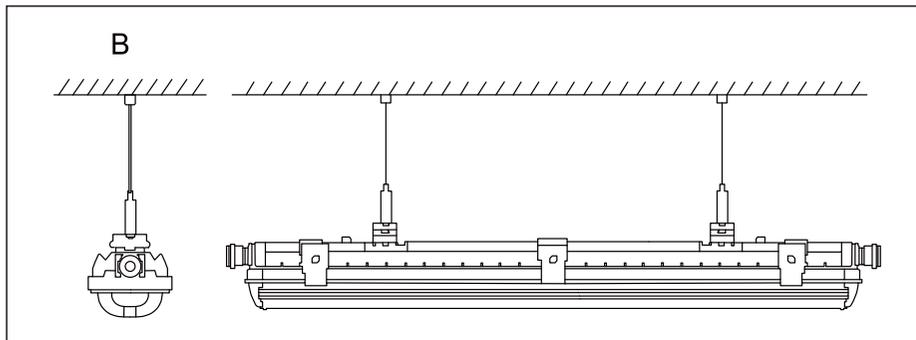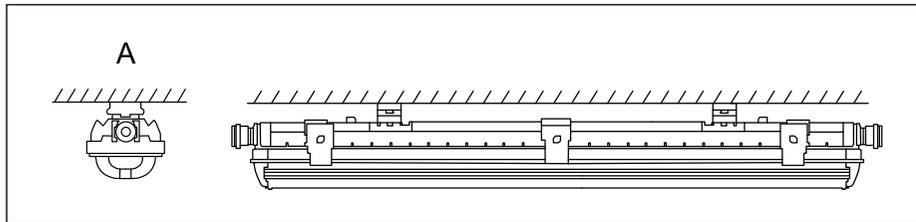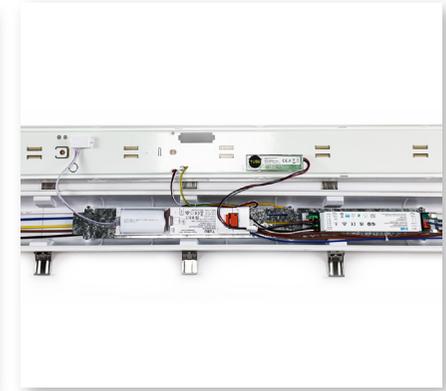

Specifications

Product Code	TBL10K15F12-B060F-HL835H-TCMS	TBL10K14F12-B040F-HL835H-TCMS	TBL10K12F12-B020F-HL835H-TCMS
Power	23W	40W	60W
Input Voltage	200-240VAC/100-277VAC(50/60HZ)		
PF	0.09A@220VAC	0.18A@220VAC	0.26A@220VAC
Dimming Option	0-10V / DALI, MW sensor, emergency		
CCT	2700K-6500K		
Luminous Flux	2990Lm±5%	5200Lm±5%	7800Lm±5%
Efficiency	130Lm/W±5% (Ra>80)		
Luminous Flux	4255Lm±5%	7400Lm±5%	11100Lm±5%
Efficiency	185Lm/W±5% (Ra>80)		
LED Brand	Lumileds / Hongli 2835		
Beam Angle	120°		
Operation Temp	-20°C~+40°C		
Storage Temp	-20°C~+60°C		
Life Span	Ta 40°C L70B50>100,000H		
IP Class	IP66		
IK Class	IK10		
Certificate	CE, ENEC, RoHS, IK10, IP66		
Lamp Body Color	PC Base (Grey) + PC Cover (Milky)		
Product Size (mm)	600*95*80	1260*95*83	1560*95*83
Packing Size (mm)	680*320*290	1280*320*200	1580*320*200
Quantity / Carton	9PCS	6PCS	6PCS
Gross Weight (kg) ±0.3	10.8	12	12.9
Installation Mode	Surface mount / Suspension mount		