


Features


- Removable and foldable PPE 2.8umol/J vertical farming LED grow light
- Super compact design, save 50% shipping cost
- Driver & dimmer integrated design, plug & play, easy to use
- Wide range watts, 680W, 800W available
- IP65 waterproof rated, suitable for damp location
- Group control, knob dimmer and RJ14 port available
- 3 years warranty
- Customization available

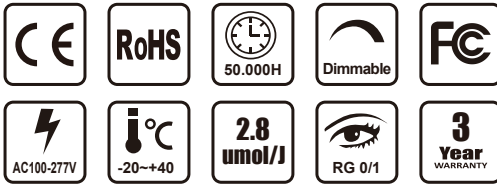


Applications


- Commercial
- Grow room
- Vertical racks

Spectrum

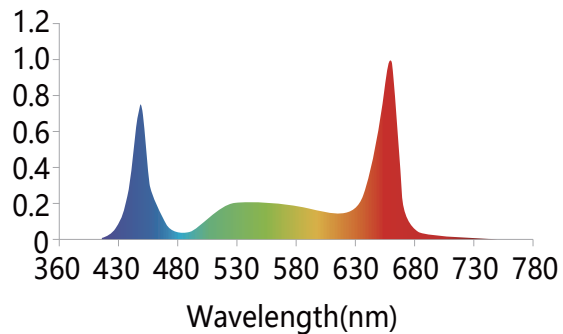


Spectrum


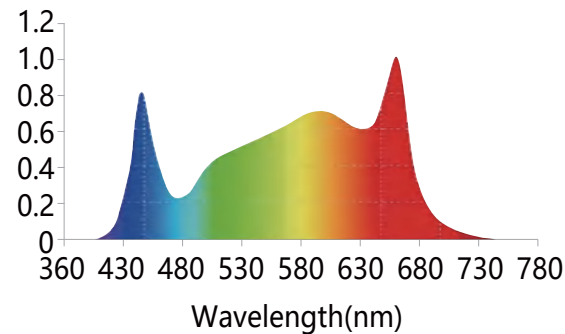


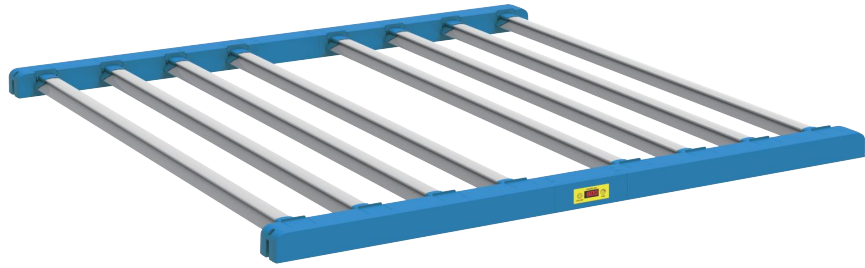

1. Easy to install, only three steps to complete the product assembly.

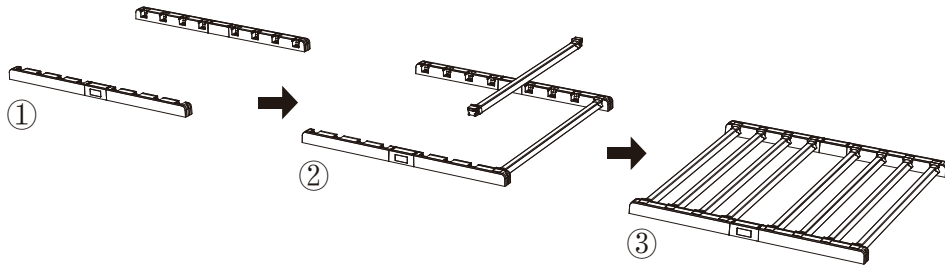

2. The holes at both ends of the lamp holder are convenient for using hooks or as fixing holes.

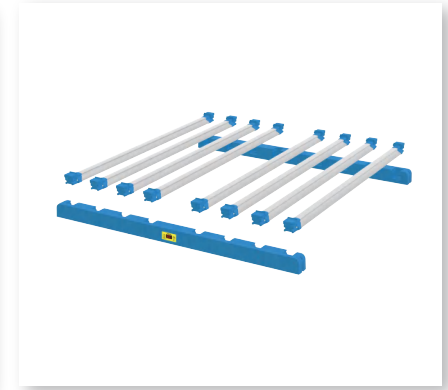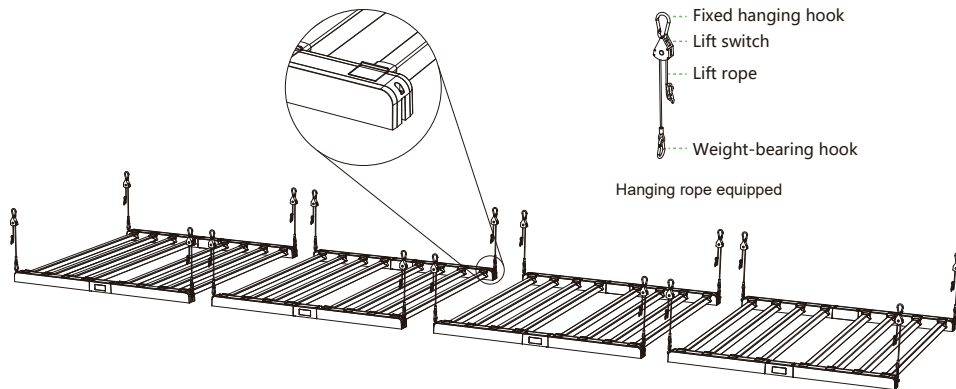

Specifications

Product Code	TBGL-N 800W	TBGL-N 680W
Wattage	800W	680W
PPF	2240umol/S	1904umol/S
PPE		2.8 umol/J
Input Voltage/frequency		100-277VAC
Dimming (Optional)		0-10V/485
Light angle		120°
Height		10~30 inch
Operating Temperature		-20~45 C, 20~95%RHNo condensation
Storage Temp & Humidity		-20~85 C, 10~95%RHNo condensation
IP Grade		IP65
Warranty		3 years
Product Size		1127*1151*57.5mm
Packing Quantity		1170*242*216mm
Net Weight		18kg
Gross Weight		19kg