



Features


- PPE 2.6umol/J
- Power: 760W, 1200W
- Has a full spectrum of plant growth
- Fits seamlessly into existing HPS layouts
- 20% energy saving compared to 1000W DE HPS
- Compatible with TUBU controllers
- Equipped with external RJ14 cable for daisy-chaining for series control (up to 80 lamps in series)



Applications

- Indoor growing house

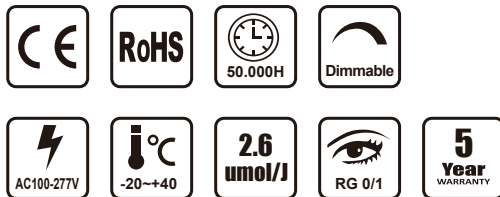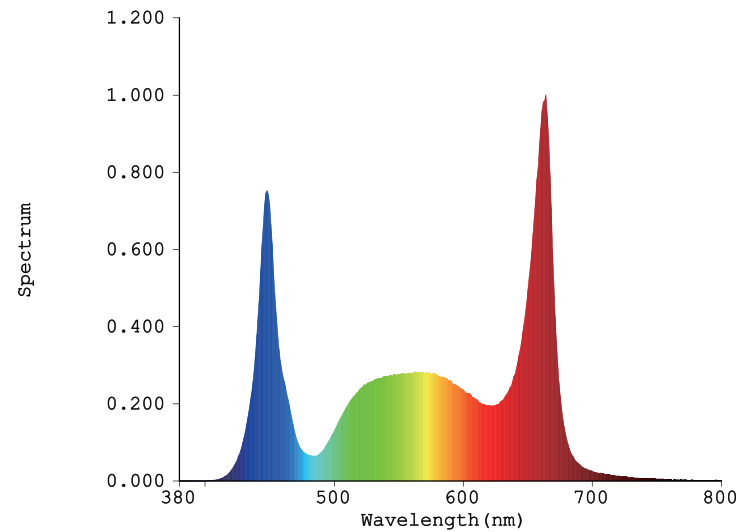

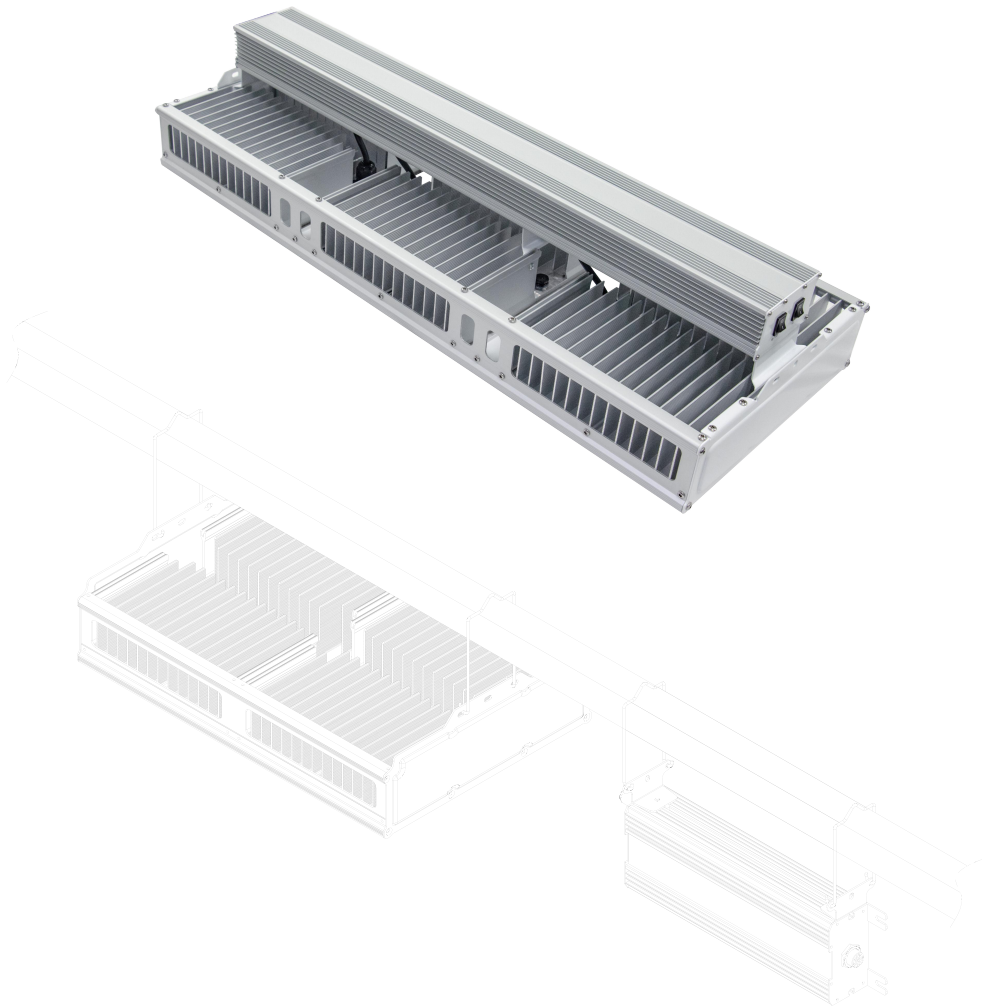

Specifications

Product Code	TB-PLD-760	TB-PLD-1200
Power	760W	1200W
Input Voltage	120-277VAC (50/60HZ)/277-480VAC (50/60HZ)	
Dimming Option	0-10V	
CCT	6500K+450nm+660nm	
PPFD	1976 μ mol/s	3120 μ mol/s
PPE	2.6 (μ mol/J)	2.6 (μ mol/J)
LED Brand	LED China/Seoul/Osram 3030/5050	
Beam Angle	100°	
Operation Temp	113° F/40°C	
Storage Temp	-40°C~+80°C	
Life Span	50000hrs	
IP Class	IP65	
Color rendering index	Ra85	
Total Harmonic Distortion(THD)	<15%	
Certificate	CETL, CE, RoHs	
Product Size (mm)	520*315*100	770*375*170
Packing Size (mm)	530*325*110	780*385*180
Quantity / Carton	1PCS	1PCS
Gross Weight (kg) \pm 0.3	16kg	19kg
Installation Mode	Surface Mount/Suspension Mount	

