




Features




- IP66, GRP IK08
- Glass fiber reinforced plastics
- System efficiency up to 140lm/W & 160lm/W
- High CRI >80
- Environmentally friendly, no mercury, No UV, No IR
- Wide beam angle 120°
- Energy efficiency Grade:C
- Quick start instant 100% luminous flux
- 5 year warranty on complete fixture. (LED's, Driver, & housing)
- Certificate: CE, RoHs certified
- Surface mount or suspension mount



Applications

- Car parks
- Poultry lighting
- Farm lighting
- Railway stations
- Airports
- Inspection pits

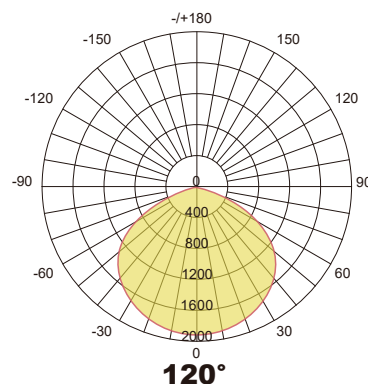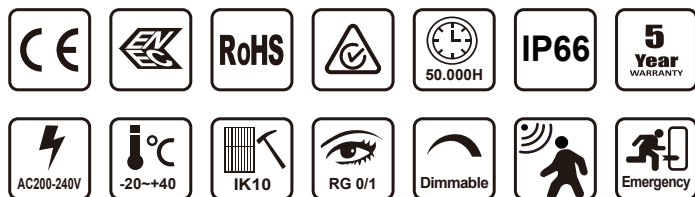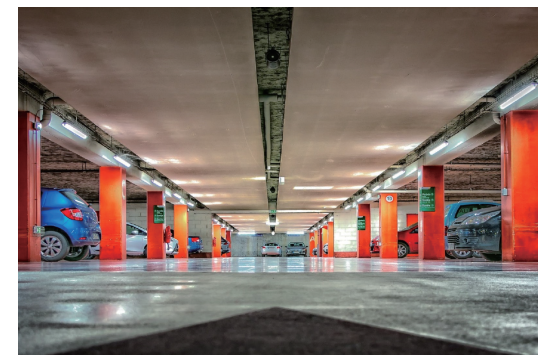

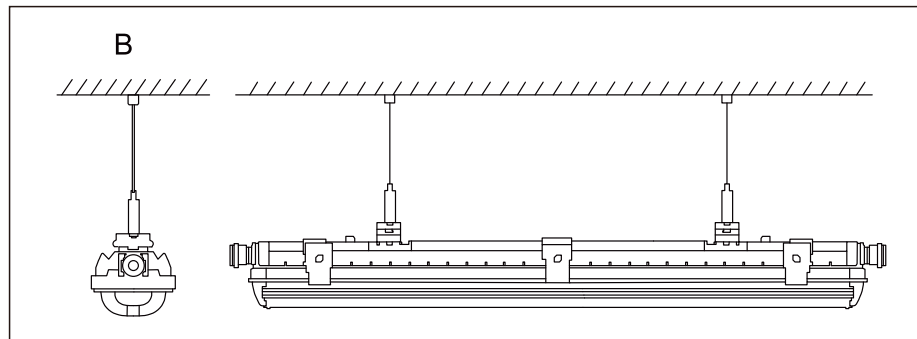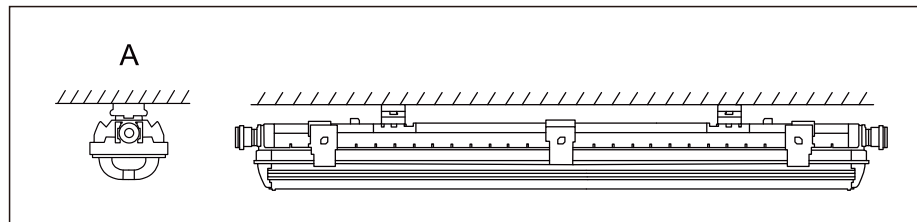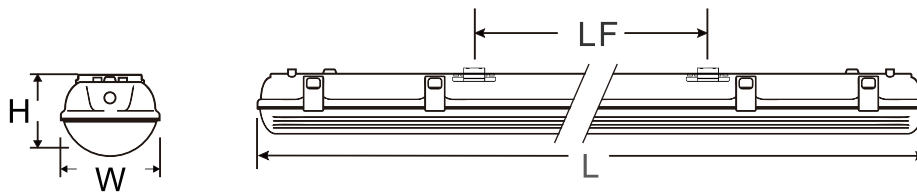

Specifications

Product Code	TBL10A4F-40W-G	TBL10A4F-100W-G
Power	40W	100W
Input Voltage	200-240VAC/100-277VAC (50/60HZ)	
PF	0.95@220VAC	
Dimming Option	0-10V/Dali	
CCT	2700-6500K	
Luminous Flux	5600Lm±5%	14000Lm±5%
Efficiency	140Lm/W±5% (Ra>80)	
Luminous Flux	6400Lm±5%	16000Lm±5%
Efficiency	160Lm/W±5% (Ra>80)	
LED Brand	Lumileds / Hongli 2835	
Beam Angle	120°	
Operation Temp	-20°C~+40°C	
Storage Temp	-20°C~+60°C	
Life Span	Ta 40°C 50000 hours	
IP Class	IP66	
IK Class	IK08	
Certificate	CE, RoHs, CB, IK08, IP66	
Lamp Body Color	Milky white GRP	
Product Size (mm)	1200*125*92	1200*260*105
Packing Size (mm)	1280*280*310	1250*280*110
Quantity / Carton	6PCS	1PCS
Gross Weight (kg) ±0.3	25.6kg	8.2kg
Installation Mode	Surface mount / Suspension mount	