



Features

- IP67 & IP69K & IK10
- PMMA IK08 / PC IK10
- System efficiency up to 140Lm/W / 160Lm/W (170Lm/W customize)
- Against water pressure of 100bar (1450psi) and temperature of 80°C
- Environmentally friendly, no mercury, no UV, no IR
- High CRI>80
- 5 years warranty
- Wide beam angle 120°
- Quick start instant 100% luminous flux
- Certificate: CE, RoHS certified
- Surface mount or suspension mount

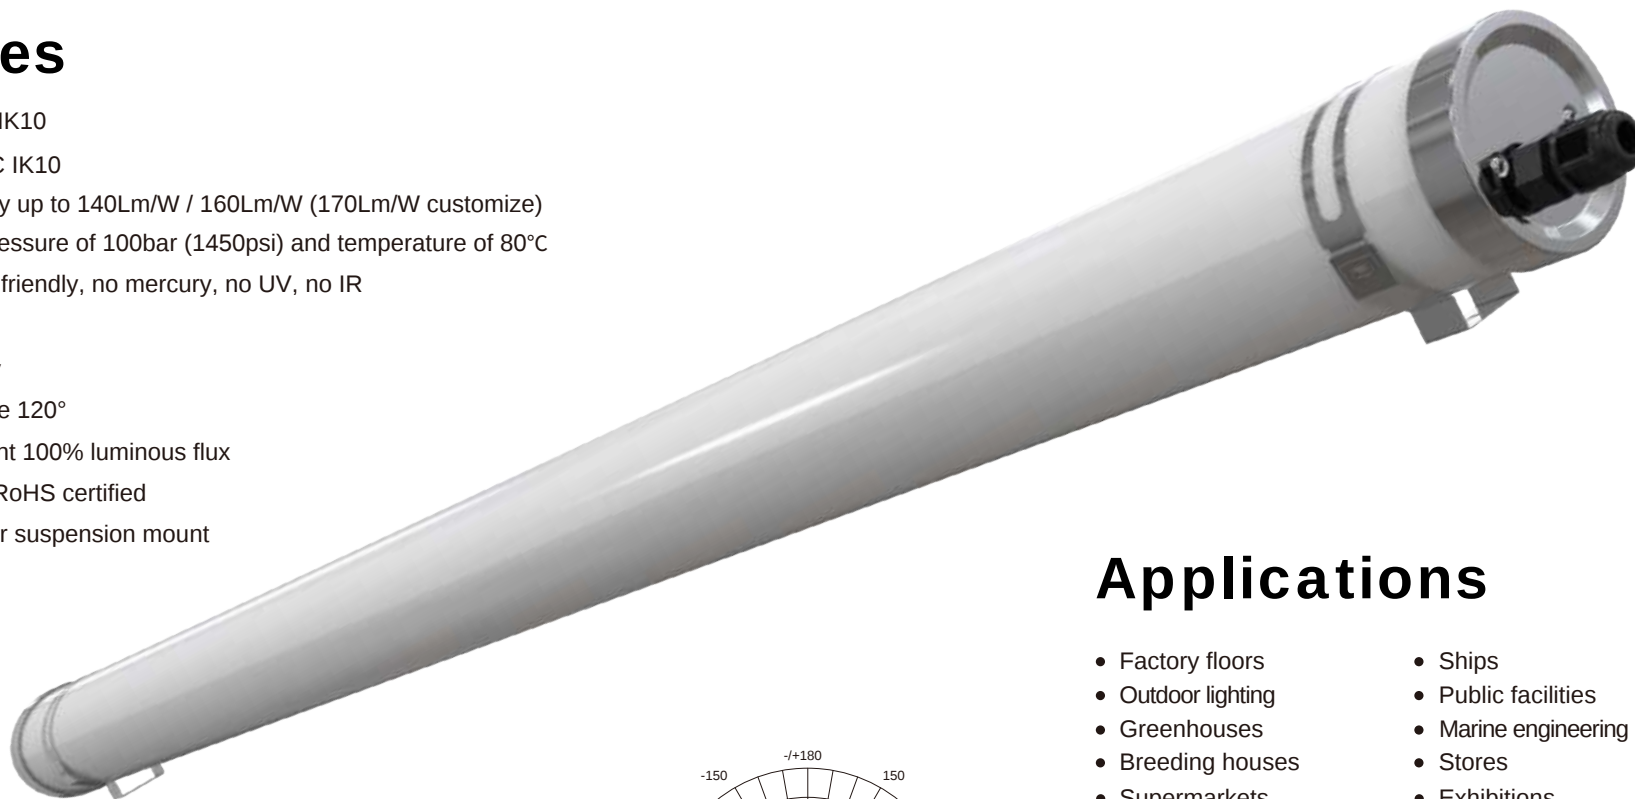


Applications

- Factory floors
- Outdoor lighting
- Greenhouses
- Breeding houses
- Supermarkets
- Conferences
- Ships
- Public facilities
- Marine engineering
- Stores
- Exhibitions
- Emergency rescue

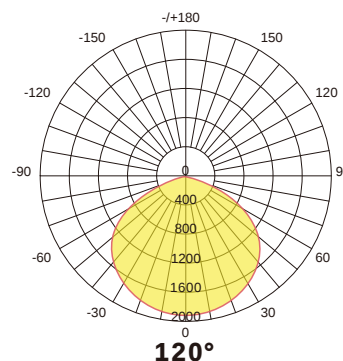





Single Installation




Linkable Installation



Surface Mount



Suspension Mount

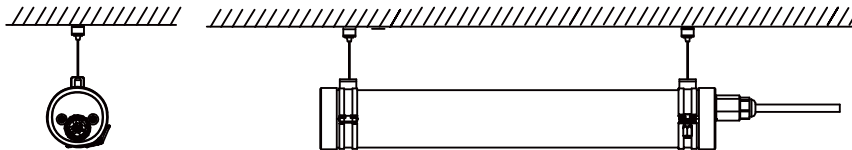

Specifications

Product Code	TBL9P2F-30W	TBL9P4F-60W	TBL9P5F-80W
Power	30W	60W	80W
Input Voltage	200-240VAC / 100-277VAC (50/60Hz)		
Input Current	0.15A@220VAC	0.3A@220VAC	0.4A@220VAC
PF	0.90@220VAC		
Function Optional	1-10V / DALI / MW Sensor / Emergency		
CCT	2700K / 3000K / 4000K / 5000K / 5700K / 6000K / 6500K		
Luminous Flux	4200Lm	8400Lm	11200Lm
Efficiency	140Lm/W±5% (Ra>80)		
Luminous Flux	5100Lm	10200Lm	13600Lm
Efficiency	170Lm/W±5% (Ra>80)		
LED Brand	Lumileds / Hongli 2835		
Driver Brand	BOKE		
Beam Angle	120°		
Operation Temp	-20°C~+40°C		
Storage Temp	-20°C~+60°C		
Life Span	Ta 40°C L70>54000 hours		
IP Class	IP67 & IP69K		
IK Class	PMMA IK08 / PC IK10		
Certificate	CE, RoHS, IK10, IP69K		
Lamp Body Color	Milky PC / PMMA housing & 304 / 316 stainless steel end caps		
Product Size (mm)	Ø105*552	Ø105*1152	Ø105*1452
Packing Size (mm)	730*340*345	1330*345*240	1630*345*240
Quantity / Carton	9PCS	6PCS	6PCS
Gross Weight (kg) ±0.3	17.2	22.2	27.2
Installation Mode	Surface mount / Suspension mount		