


Low Glare UFO High Bay Light

Features



- Whole light efficiency: 140LM/W
- LED Brand: LUMILEDS
- Color tolerance: SDCM<5
- Anti-glare value: UGR<22
- Beam angle: 60°(PC lens + transparent glass cover)
- IP grade: IP65
- Control mode (optional): 1-10V dimming/microwave sensor/zigbee control system
- Installation method: hanging ring & bracket
- Warranty: 5 years

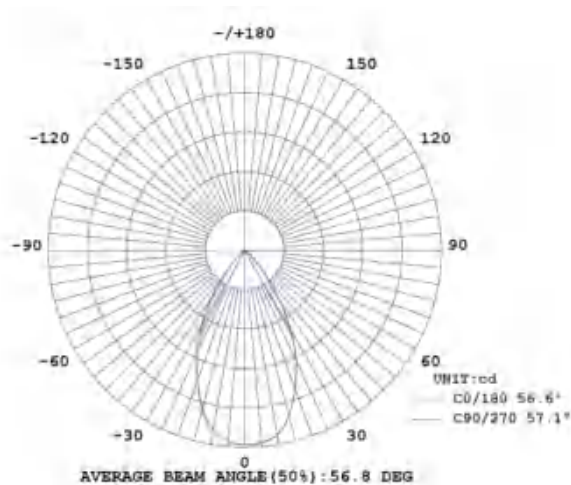

Applications

- Warehouses
- Factories
- Supermarkets
- Hospitals
- Gymnasiums
- Toll stations



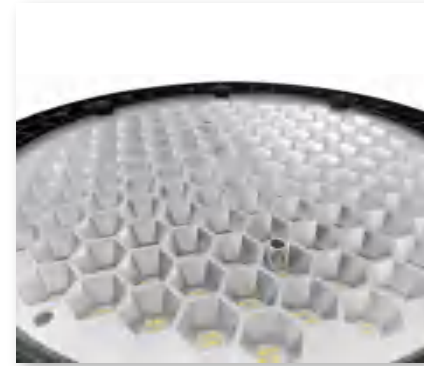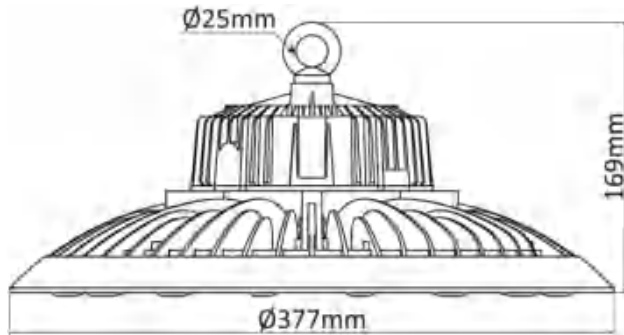

UGR Test Data

Uncorrected UGR Table

Report number:

MANUFACTURER:		Address:								
NAME:		TYPE:			WEIGHT:					
SPECIFICATION:		DIMENSION:			SERIAL No.:					
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2h y = 2h	18.8	19.7	19.0	19.9	20.1	19.2	20.2	19.5	20.4	20.2
3h	18.6	19.5	18.9	19.7	19.9	19.1	20.0	19.3	20.2	20.4
4h	18.5	19.4	18.8	19.6	19.8	19.0	19.8	19.1	20.1	20.3
5h	18.4	19.2	18.7	19.5	19.7	18.9	19.7	19.2	19.9	20.2
6h	18.4	19.1	18.7	19.4	19.7	18.9	19.6	19.2	19.9	20.1
12h	18.4	19.2	18.7	19.3	19.6	18.8	19.5	19.1	19.8	20.1
4h	2h	18.5	19.4	18.8	19.6	19.8	19.8	19.3	20.1	20.3
	3h	18.4	19.2	18.7	19.5	19.6	18.8	19.5	19.2	19.8
	4h	18.3	18.9	18.6	19.3	19.5	18.7	19.4	19.1	19.7
	6h	18.2	18.8	18.6	19.1	19.4	18.6	19.2	19.0	19.6
8h	4h	18.1	19.7	18.5	19.0	19.4	18.6	19.1	19.0	19.5
	6h	18.1	18.6	18.5	18.9	19.3	18.6	19.0	19.0	19.4
	12h	18.1	18.6	18.5	18.9	19.3	18.6	19.0	19.0	19.4
8h	4h	18.1	18.7	18.5	19.0	19.4	18.6	19.1	19.0	19.5
	6h	18.0	18.9	18.5	18.9	19.3	18.5	18.9	18.9	19.3
	8h	18.0	18.4	18.4	18.8	19.2	18.5	18.8	18.9	19.2
	12h	17.9	18.2	18.4	18.7	19.2	18.4	18.7	18.9	19.2

Specifications

Product Code	TB-UFOH100	TB-UFOH150	TB-UFOH200
Power	100W	150W	200W
Input Voltage	100-277 VAC; 50Hz/60Hz		
Exterior Color	Black / Grey		
Power Supply Efficiency	>93%		
Power Factor	PF>0.90		
Energy Saving Level	D		
CCT	3000K/4000K/5000K/5700K/6500K		
Luminous Flux	14,000Lm	21,000Lm	28,000Lm
LED Luminous Efficiency	140 lm/w		
Color Rendering Index CRI	Ra≥70 (Ra≥80)		
Lamp Material	Aluminum/Clear Tempered Glass/PC		
Color Tolerance SDCM	<5		
Start Time	<0.2S		
Working Temperature	-30°C ~+50°C		
Humidity	10% ~ 90% RH		
Life Span	50000 hours		