TUBU

Stainless Steel LED Batten Light L10H



Features


- IP66
- PC IK10 /Glass IK08
- Stainless steel clips
- Boke isolated flicker free driver
- 130Lm/W,150Lm/W system efficiency CRI>80 (Honglitronic brand leds)
- tempered glass, metal bottom shell
- Self-test emergency with LiFePO4 battery optional
- Microwave sensor options (wireless control)
- Ambient temperatures: -20°C to + 40°C
- Options: 0-10V, Motion Sensor, DALI, Emergency
- 5 years warranty on complete fixture (LED's, Driver & Housing)
- Certificate: CE, RoHs Certified
- Surface Mount or Suspension Mount

Applications

- Marine
- Offshore platforms
- Seaports
- Offshore oil platforms
- Chemical production
- Pharmaceutical industry
- Treatment plants
- Chemical reaction chambers
- Storage areas
- Laboratories
- Food processing






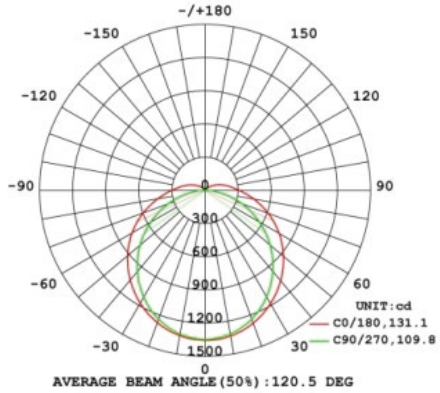














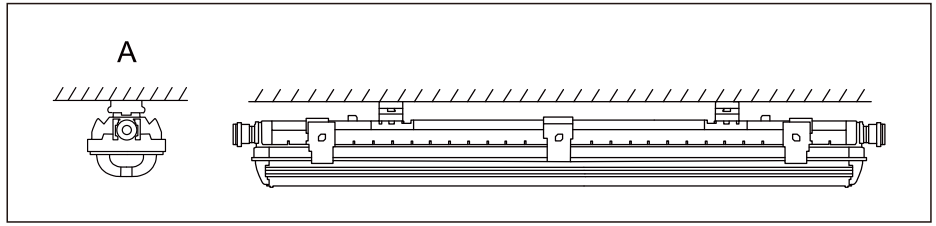

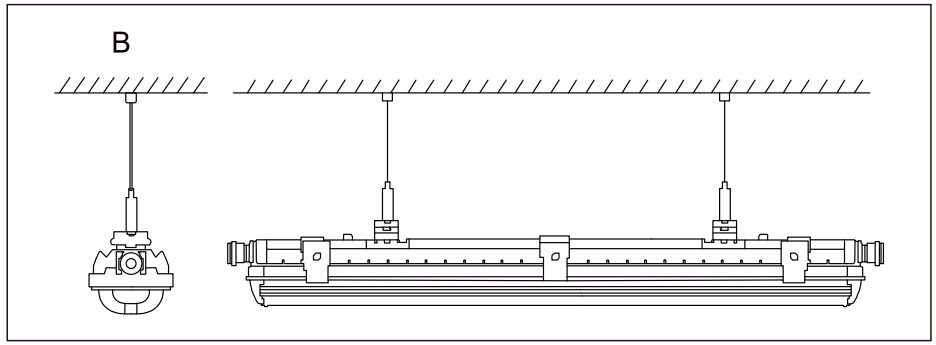

Specifications

Product Code	TBL10H12F-18W	TBL10H14F-36W	TBL10H15F-50W	TBL10H15F-60W
Power	18W	36W	50W	60W
Input Voltage	100-240/277VAC (50/60Hz)			
PF	0.90@220VAC			
Dimming Option	0-10V/Dali			
CCT	2700K / 3000K / 4000K / 5000K / 5700K / 6000K /6500K			
Luminous Flux	2340Lm/2700Lm	4680Lm/5400Lm	6500Lm/7500Lm	7800Lm/9000Lm
Efficiency	130Lm/W±5% (Ra>80)/150Lm/W±5%			
LED Brand	Lumileds / Hongli 2835			
Beam Angle	120°			
Operating Temperature	-20°C~+40°C			
Storage Temperature	-20°C~+60°C			
Life Span	Ta 40°C L70>100000 hours			
IP Class	IP66			
IK Class	PC IK10 /Glass IK08			
Certificate	CE, RoHS			
Lamp Body Color	tempered glass, metal bottom shell			
Product Size (mm)	700*140*90	1300*140*90	1600*140*90	1600*140*90
Packing Size (mm)	750*195*145	1350*195*145	1650*195*145	1650*195*145
Quantity / Carton	1PCS	1PCS	1PCS	1PCS
Gross Weight (kg) ±0.3	3.6	5.4	7.3	7.3
Installation Mode	Surface mount / Suspension mount			