

# TUBU

## Ø59mm LED Tubular Light L9S



### Features

- IP67 & IP69K & IK10
- PMMA IK08 / PC IK10
- Anti-ammonia
- System efficiency up to 140Lm/W, 150Lm/W, 160Lm/W
- Against water pressure of 100bar (1450psi) and temperature of 80°C
- High CRI>80
- Environmentally friendly, no mercury, no UV, no IR
- Wide beam angle 120°
- 5 years warranty
- Quick start instant 100% luminous flux
- Surface mount or suspension mount




### Applications

- Factory workshops
- Warehouses
- Logistics centers
- Parks
- Squares
- Scenic spots
- Ships
- Outdoor parking lots
- Bus stops
- Food processing
- Pharmaceutical industry
- Agriculture
- Animal husbandry
- Marine engineering

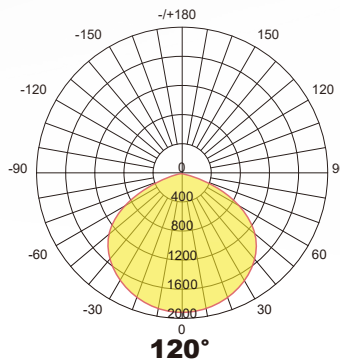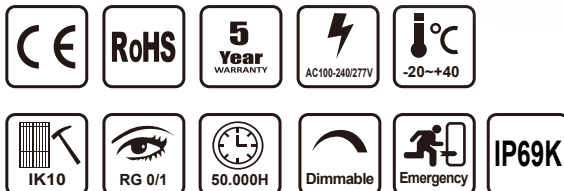





### Single Installation




### Linkable Installation



### Surface Mount



### Suspension Mount

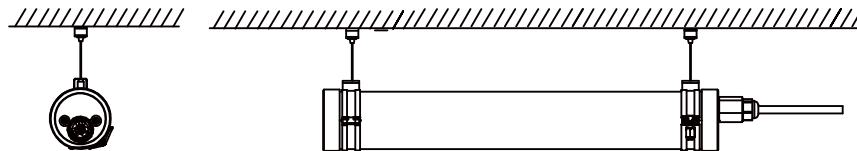

## Specifications

Product Code	TBL9S2F-18W	TBL9S4F-36W	TBL9S5F-52W
Power	18W	36W	52W
Input Voltage	100-240/277VAC (50/60Hz)		
Input Current	0.09A@220VAC	0.19A@220VAC	0.23A@220VAC
PF	0.90@220VAC		
Function Optional	1-10V / DALI / Emergency		
CCT	2700K / 3000K / 4000K / 5000K / 5700K / 6000K /6500K		
Luminous Flux	2520Lm	5040Lm	7280Lm
Efficiency	140Lm/W±5% (Ra>80)		
Luminous Flux	2700Lm	5400Lm	7800Lm
Efficiency	150Lm/W±5% (Ra>80)		
Luminous Flux	2880Lm	5760Lm	8320Lm
Efficiency	160Lm/W±5% (Ra>80)		
LED Brand	Lumileds / Hongli 2835		
Beam Angle	120°		
Driver Brand	BOKE		
Operation Temp	-20°C ~+40°C		
Storage Temp	-20°C ~+60°C		
Life Span	Ta 40°C L70>100000 hours		
IP Class	IP67 & IP69K		
IK Class	PMMA IK08 / PC IK10		
Certificate	CE, RoHS, IK10, IP69K		
Lamp Body Color	Milky PC / PMMA housing & 304 / 316 stainless steel end caps		
Product Size (mm)	∅59*552	∅59*1152	∅59*1452
Packing Size (mm)	725*260*255	1335*200*200	1635*200*200
Quantity / Carton	16PCS	9PCS	9PCS
Gross Weight (kg) ±0.3	22.4	15.75	17.55
Installation Mode	Surface mount / Suspension mount		