TUBU

Stepless Beam Angle Zoom LED Searchlight

Features

- Protection class: IP66
- Power: 300W(main lamp), 60W(PTZ drive power)
- Irradiation distance: 3.5° ≥1000 m (1 lux)
- Adjustable beam angle:3.5° ~ 20°
- Slip-rings provide continuous 360° horizontal rotation with no stop points
- Operating temperature range: -25°C to +55°C
- Materials: marine grade aluminum and stainless steel with salt-resistant powder coat finish
- Materials: Lamp housing adopts 1070 pure aluminum cold-forging; fasteners & partial struc
- Lower power consumption: LEDs consume 75% or more less power than halogen lamps.
- Longer service life: LED sources work for tens-of-thousands of hours, while halogen lamps
- only last 1000-2000 hours. It reduces lamp-replacement cost and improves system rel ability.




CE

3 Year WARRANTY

IP66

RoHS

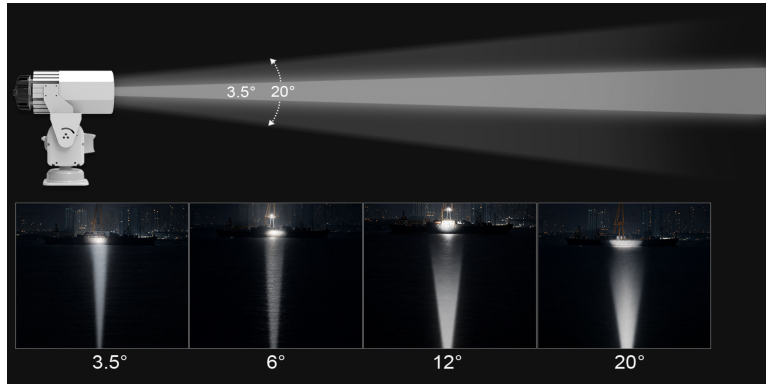

Applications


- Cruise Ship
- Emergency, Fire & Rescue
- Military & Defense
- Agriculture, Forestry & Field
- Prisons
- Airport
- Hydropower Station










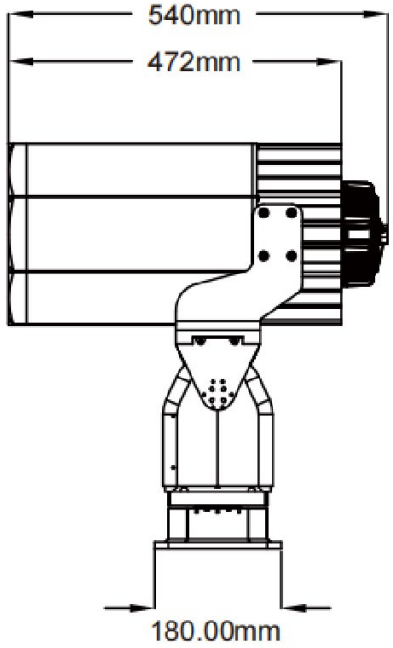

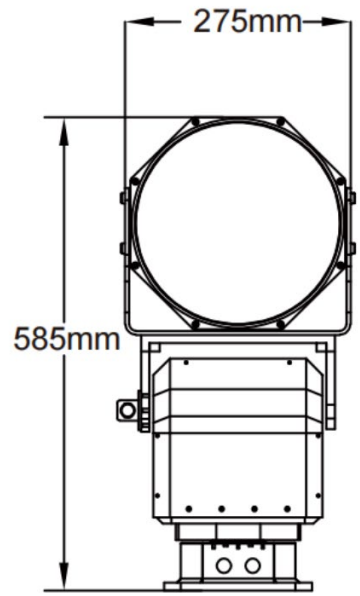

Specifications

TBSL-T2H-200E-BSX General Information		
Light Information	Light Source	LED
	Power Consumption	300W+60W
	Color Temperature	6500K
	Input Voltage	AC 110V/220V 50/60HZ
	Working Temperature	-25°C～+55°C
	IP Rating	IP66
	Lifespan	Light：3 years；Adjustable Based: 1 year
	Beam Angle	3.5°~20°
	Beam Distance	3.5° ≥1000m(1LUX)
	Weight	40KG
	Packing Size (mm)	600*500*800mm(wooden box package)
	Material	1070 Pure aluminum cold forging, with salt-resistant, scratch-resistant white powder coat finish
	Driver Brand	Inventronics
Cloud Platform (Optional)	Adjustable Speed	Horizontal: 0.1~20°/S,Vertical:0.1~5°/S
	Adjustable Angle	Horizontal: 0～360°，vertical +35°～-35°，or customizable
	Repeated Positioning Accuracy	±0.1°
	Preset Position	200pcs
	Communication Baud Bate	2400 / 4800 / 9600 / 19200bps(optional)
	Communication Interface	RS485 / RS422
	Power	60W
	Product Size (mm)	540*275*585
	Packing Size (mm)	600*400*600