


Features


- IP66, IK10
- Stainless steel clips
- 130Lm/W, 150Lm/W, 170Lm/W, 180Lm/W system efficiency, CRI>80 PC milky cover
- Self-test emergency with LiFePO4 battery option
- Microwave sensor options (wireless control)
- Ambient temperature: -20°C ~ +40°C
- 5 years warranty, CE, RoHS SAA, ENEC, CB certified
- Options: PIR sensor, Microwave motion sensor, DALI, 1-10V, Triac, Emergency
- Surface mount or suspension mount



Applications

- Workshop
- Factory
- High Racking
- Cold storage
- Car parks
- Supermarket
- Tunnel
- Underpasses
- Semi-outdoor corridor
- Warehouse
- Storage
- School lighting

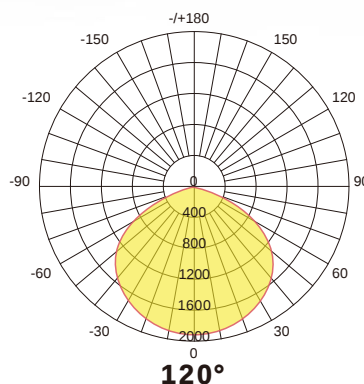

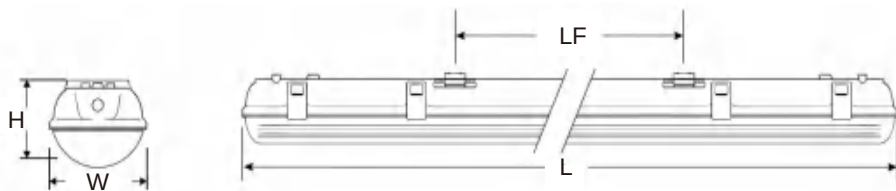

Specifications

Product Code	TBL1002F-20W-O	TBL1004F-40W-O	TBL1005F-60W-O
Power	20W(18W/15W/13W)	40W(36W/30W/25W)	60W(52W/44W/35W)
Input Voltage	200-240VAC / 100-277VAC (50/60Hz)		
Input Current	0.09A@220VAC	0.28A@220VAC	0.38A@220VAC
PF	0.90@220VAC		
Function Optional	PIR sensor, Microwave motion sensor, DALI, 1-10V, Triac, Emergency		
CCT	2700K / 3000K / 4000K / 5000K / 5700K / 6000K / 6500K		
Luminous Flux	2600lm / 3000lm	5200lm / 6000lm	7800lm / 9000lm
Efficiency	130Lm/W±5%(Milky PC Cover) / 150Lm/W±5%(Milky PC Cover)		
Luminous Flux	3400lm / 3600lm	6800lm / 7200lm	10200lm / 10800lm
Efficiency	170Lm/W±5%(Milky PC Cover) / 180Lm/W±5% (Semi-clear PC Cover)		
LED Brand	Lumileds / Hongli 2835		
Driver Brand	BOKE		
Beam Angle	120°		
Operation Temp	-20°C~+40°C		
Storage Temp	-20°C~+60°C		
Life Span	Ta 40°C L70>54000 hours		
IP Class	IP66		
IK Class	IK10		
Certificate	CE, RoHS,SAA,ENEC,CB		
Lamp Body Color	PC Base (Grey) + PC Cover (Milky or Semi-clear)		
Product Size (mm)	600*80*72	1200*80*72	1500*80*72
Packing Size (mm)	640*255*260	1240*255*260	1540*255*260
Quantity / Carton	15PCS	9PCS	9PCS
Gross Weight (kg) ±0.3	10	19	27.8
Installation Mode	Surface mount / Suspension mount		