

Slimline LED Flood Light TG1



Features

- High output LED's, up to 130Lm/W ~ 150Lm/W
- High CRI>70
- Lumileds LEDs
- Brand driver, TUV UL CE certificates, PF>0.96 THD<12
- 30° / 60° / 90° / 120° / 30*90° / TYPE III multi beam angles for option
- Durable tempered glass front
- Environmentally friendly, no mercury, no UV no IR
- IP66, indoor & outdoor use
- Quick to install and easy to use, secure and reliable
- 5 years warranty
- Certificate: CE, RoHS



Applications

- Parking lot lighting
- Car lot lighting
- Street lighting
- Walkway lighting
- Building accent lighting
- Area & storage lighting

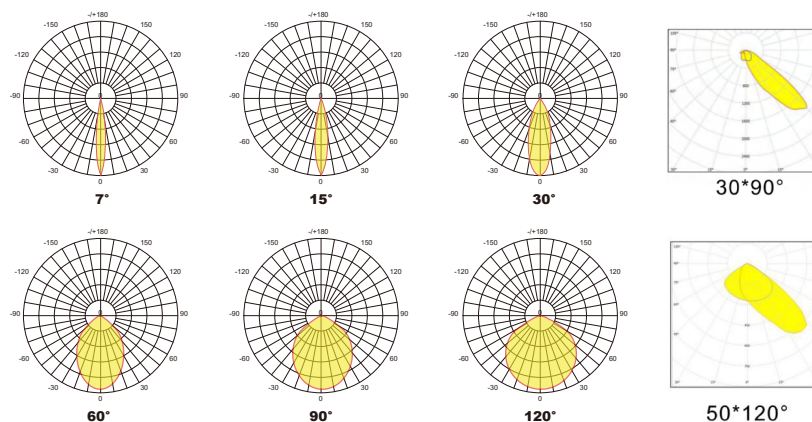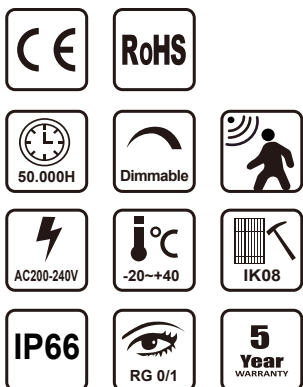



Specifications

Product Code	TBTG1-20W	TBTG1-30W	TBTG1-50W	TBTG1-100W	TBTG1-150W	TBTG1-200W	TBTG1-250W	TBTG1-300W	TBTG1-400W
Power	20W	30W	50W	100W	150W	200W	250W	300W	400W
Input Voltage	200-240VAC (50/60Hz)								
PF	>0.9@220VAC								
Dimming (Optional)	0-10V / DALI dimming								
CCT	3000K / 4000K / 5000K / 6000K								
Luminous Flux	2400lm	3600lm	6000lm	12000lm	18000lm	24000lm	30000lm	36000lm	48000lm
Efficiency	130Lm/W±5% (Ra>70 5000K)								
Luminous Flux	2600lm	3900lm	6500lm	13000lm	19500lm	26000lm	32500lm	39000lm	52000lm
Efficiency	150Lm/W±5% (Ra>70 5000K)								
LED Brand	Lumileds / Hongli								
Light Type	SMD 3030 or SMD 2835								
Operation Temp	-40°C~+45°C								
Storage Temp	-40°C~+60°C								
Life Span	Ta 45°C L70>54000 hours								
IP Class	IP66								
IK Class	IK08								
Certificate	CE, RoHS								
Lamp Body Color	Black (RAL9005)								
Product Size (mm)	122*182*47	169*248*51	228*288*52	278*364*53	394*394*56	394*445*56	394*497*58	394*497*58	545*523*65
Packing Size (mm)	405*275*220	365*270*315	475*310*315	390*305*315	440*320*115	490*420*115	540*420*115	540*420*115	580*550*115
Quantity / Carton	20pcs	10pcs	10pcs	5pcs	1pcs	1pcs	1pcs	1pcs	1pcs
Gross Weight (kg)	16kg	12kg	18kg	13kg	5.6kg	6.6kg	8.1kg	8.6kg	12.3kg
Installation Mode	Horizontal installation / Wall mounting / Ceiling installation								

