


Features

- UGR<19 low glare
- PMMA IK08 / PC IK10
- IP67 & IP69K
- Against water pressure of 100bar (1450psi) and temperature of 80°C
- System efficiency 130Lm/W & 150Lm/W
- High CRI>80
- 304 / 316 stainless steel end caps, breather, mounting bracket
- Flicker free
- Wide range beam angle 40°/60°/90°
- CE, RoHS, IP69K, IK10, certified
- 5 years warranty




Applications

- Parking lots
- Warehouses
- Factories
- Subway stations
- Tunnels
- Parks
- Squares
- Ports
- Steel mills
- Chemical plants
- Water treatment
- Inspection pits

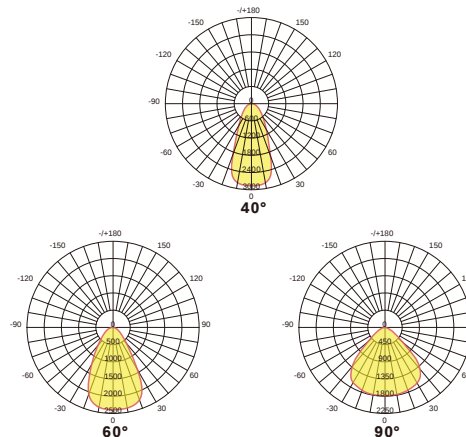





Single Installation




Linkable Installation



Surface Mount



Suspension Mount

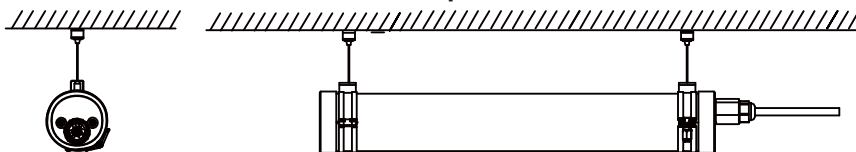

Specifications

Product Code	TBL92F-20W-DXG	TBL94F-40W-DXG	TBL95F-50W-DXG	TBL95F-60W-DXG
Power	20W	40W	50W	60W
Input Voltage	200-240VAC / 100-277VAC (50/60Hz)			
Input Current	0.09A@220VAC	0.19A@220VAC	0.23A@220VAC	0.28A@220VAC
PF	0.90@220VAC			
Function Optional	0-10V / DALI / Emergency			
CCT	2700K / 3000K / 4000K / 5000K / 5700K / 6000K / 6500K			
Luminous Flux	2600Lm / 3000Lm	5200Lm / 6000Lm	6500Lm / 7500Lm	7800Lm / 9000Lm
Efficiency	130Lm/W±5% / 150Lm/W±5% (Ra>80)			
LED Brand	Lumileds / Hongli 3030			
Driver Brand	BOKE			
Beam Angle	40° UGR<16 / 60° UGR<19 / 90° UGR<22			
Operation Temp	-20°C~+40°C			
Storage Temp	-20°C~+60°C			
Life Span	Ta 40°C L70>54000 hours			
IP Class	IP67 & IP69K			
IK Class	PMMA IK08 / PC IK10			
Certificate	CE, RoHS, IP69K			
Lamp Body Color	Milky PC / PMMA housing & 304 / 316 stainless steel end caps			
Product Size (mm)	∅ 75*552	∅ 75*1152	∅ 75*1452	∅ 75*1452
Packing Size (mm)	730*260*260	1330*260*180	1630*260*180	1630*260*180
Quantity / Carton	9PCS	6PCS	6PCS	6PCS
Gross Weight (kg) ±0.3	9.7	12.2	15	15
Installation Mode	Surface mount / Suspension mount			