


## Features


- Removable and foldable PPE 2.7umol/J 8 bar vertical farming LED grow light
- Super compact design, save 50% shipping cost
- Driver & dimmer integrated design, plug & play, easy to use
- Wide range watts, 600W,800W, 1000W ,1200W available
- IP54 Waterproof rated, suitable for damp location, no irrigating concerns
- Group control, Knob dimmer and RJ12 port available
- 3 Years Warranty
- Customization available

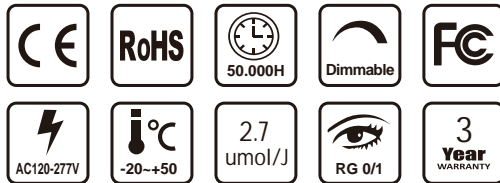


## Applications





- Commercial
- Grow room
- Vertical racks

Spectrum

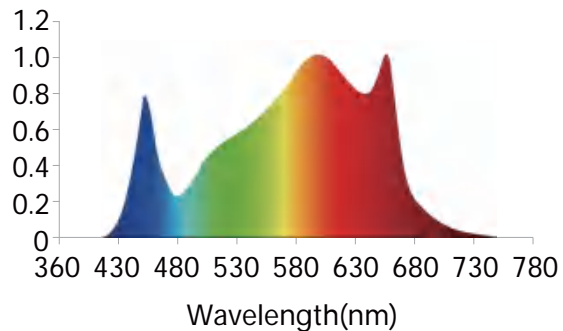

Spectrum

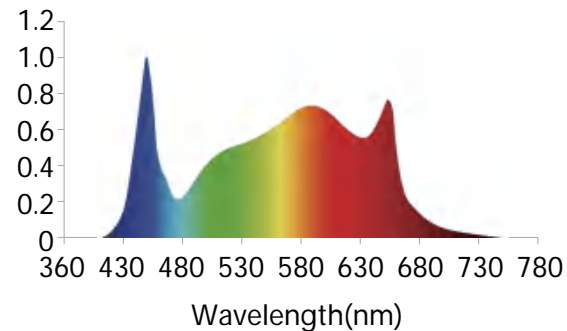

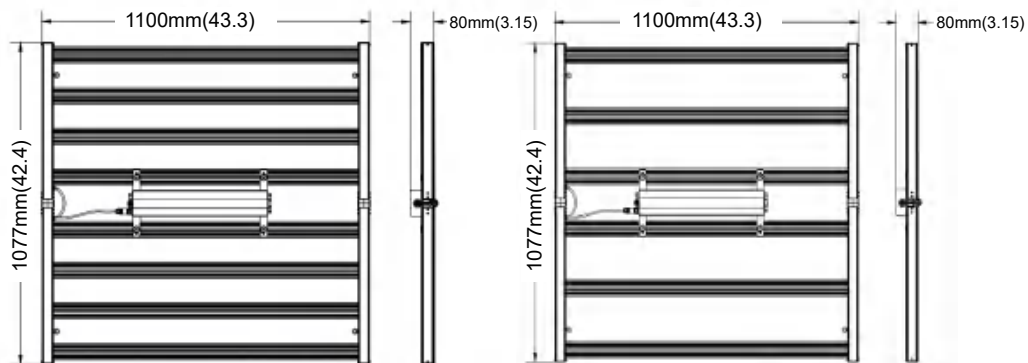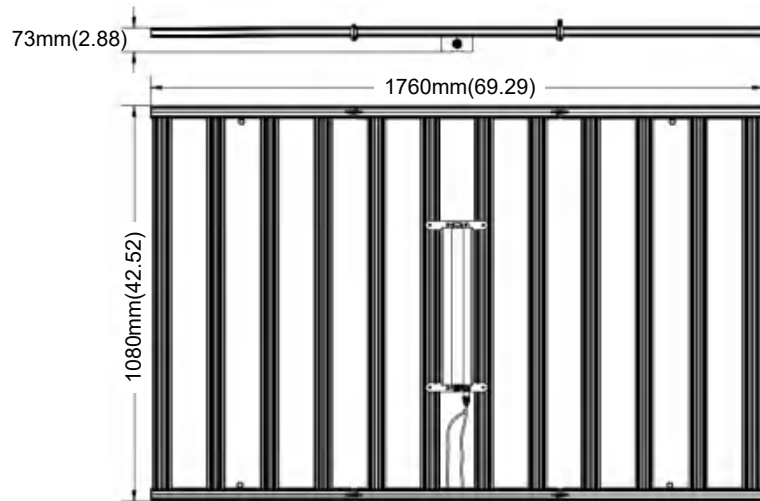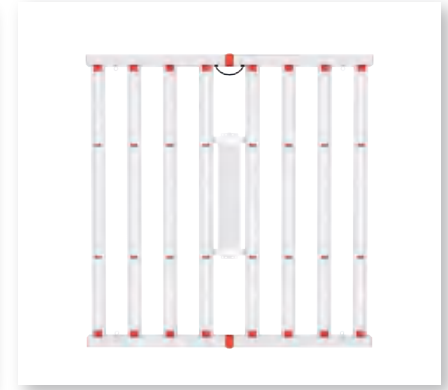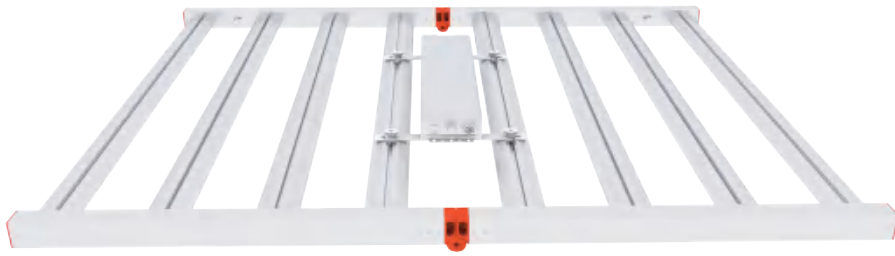

## Specifications

Product Code	TBGL-V-600W-6	TBGL-V-800W-8	TBGL-V-1000W-8	TBGL-V-1200W-12
Wattage	600W	800W	1000W	1200W
PPF	1560 $\mu$ mol/s	2080 $\mu$ mol/s	2600 $\mu$ mol/s	3240 $\mu$ mol/s
PPE	2.6 $\mu$ mol/s/W ( $\mu$ mol/J)		2.7 $\mu$ mol/s/W ( $\mu$ mol/J)	
Input Voltage/frequency	AC120-277V/AC249-528V			
Dimming (Optional)	0% 20% 40% 60% 80% 100%			
PF	>0.95			
CCT	4000K+660nm			
Light angle	120°			
LED Brand	LEDESTA 2835/3535			
Operation Temp	-20 C ~+50 C , 20-95%RH No condensation			
Storage Temp	-20-85 C ,10-95%RHNo condensation			
IP Grade	IP54			
Certificate	CE, RoHs			
Product Size (mm)	1100*1077*80	1100*1077*80	1100*1077*80	1760*1080*73
Packing Size (mm)	1125*590*115	1125*590*115	1125*590*115	1120*655*190
Quantity/carton	1PCS			
Installation mode	Surface Mount/Suspension Mount			